


LOC/DME I-OJW <b>108.3</b> Chan 20	APP CRS <b>183°</b>	Rwy Ldg TDZE <b>54</b> Apt Elev <b>56</b>
--	------------------------	---

# LDA RWY 20R



JOHN WAYNE/ORANGE COUNTY (SNA)

DME required.	MALSR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct SLI VORTAC and hold.
Circling Rwy 20L NA at night. For inop ALS, increase S-LDA 20R Cat C/D visibility to RVR 6000.		

D-ATIS <b>126.0</b>	SOCAL APP CON <b>121.3 263.1</b>	JOHN WAYNE TOWER * <b>126.8 (CTAF) 0 343.625</b>	GND CON <b>120.8</b>	UNICOM <b>122.95</b>
------------------------	-------------------------------------	---	-------------------------	-------------------------

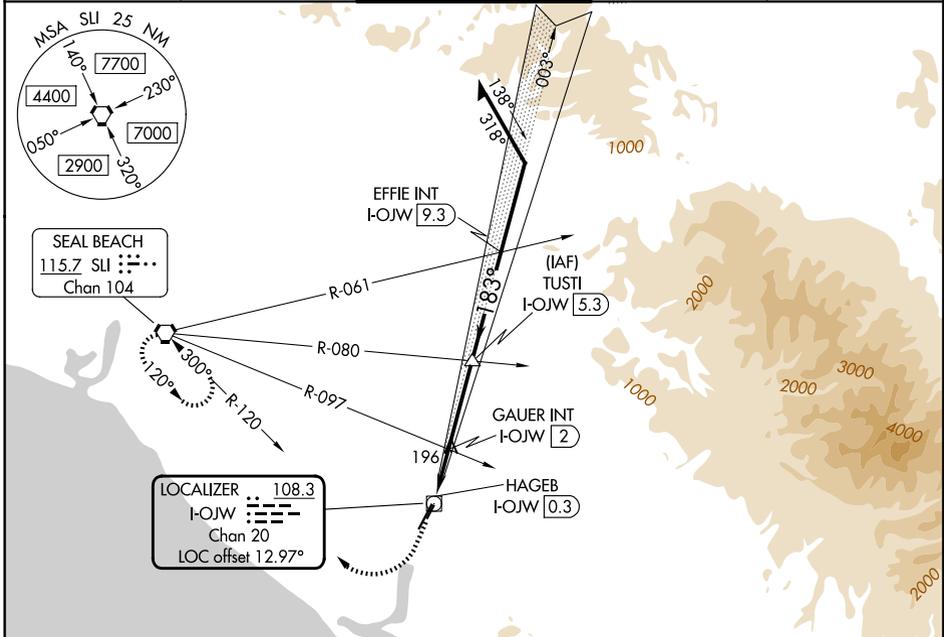

ELEV 56	<b>D</b>	TDZE 54
---------	----------	---------

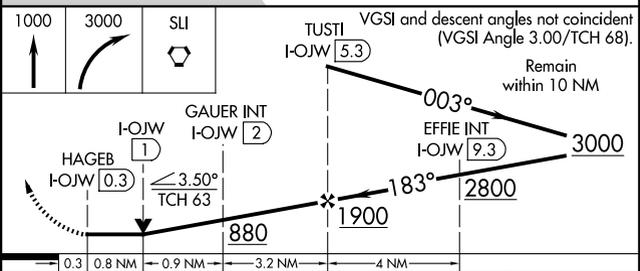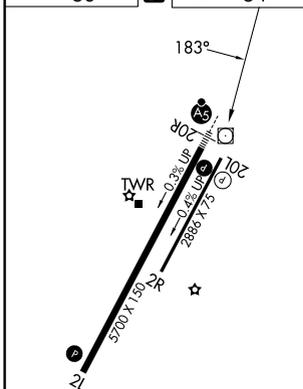

CATEGORY	A	B	C	D
S-LDA 20R	460/24	406 (500-½)	460/40	406 (500-¾)
CIRCLING	640-1	584 (600-1)	840-2¼ 784 (800-2¼)	1180-3 1124 (1200-3)

REIL Rwy 20L  
MIRL Rwy 2R-20L  
HIRL Rwy 2L-20R

SW-3, 19 MAR 2026 to 16 APR 2026

SW-3, 19 MAR 2026 to 16 APR 2026