

|             |          |             |
|-------------|----------|-------------|
| APP CRS     | Rwy Ldg  | <b>5700</b> |
| <b>196°</b> | TDZE     | <b>54</b>   |
|             | Apt Elev | <b>56</b>   |

# RNAV (RNP) Z RWY 20R


JOHN WAYNE/ORANGE COUNTY (SNA)

RNP AR APCH - GPS. Authorization required. From JWARD: min RNP 0.50. From KLEVR, RF, min RNP 0.70.


For uncompensated Baro-VNAV systems, procedure NA below 5°C or above 54°C.

MALSR  MISSED APPROACH: Climb to 3000 on track 196° to MINOE and hold, continue climb-in-hold.

|                        |                                     |   |                         |                         |
|------------------------|-------------------------------------|---|-------------------------|-------------------------|
| D-ATIS<br><b>126.0</b> | SOCAL APP CON<br><b>121.3 263.1</b> | JOHN WAYNE TOWER ★<br><b>126.8 (CTAF) 343.625</b> | GND CON<br><b>120.8</b> | UNICOM<br><b>122.95</b> |
|------------------------|-------------------------------------|---|-------------------------|-------------------------|

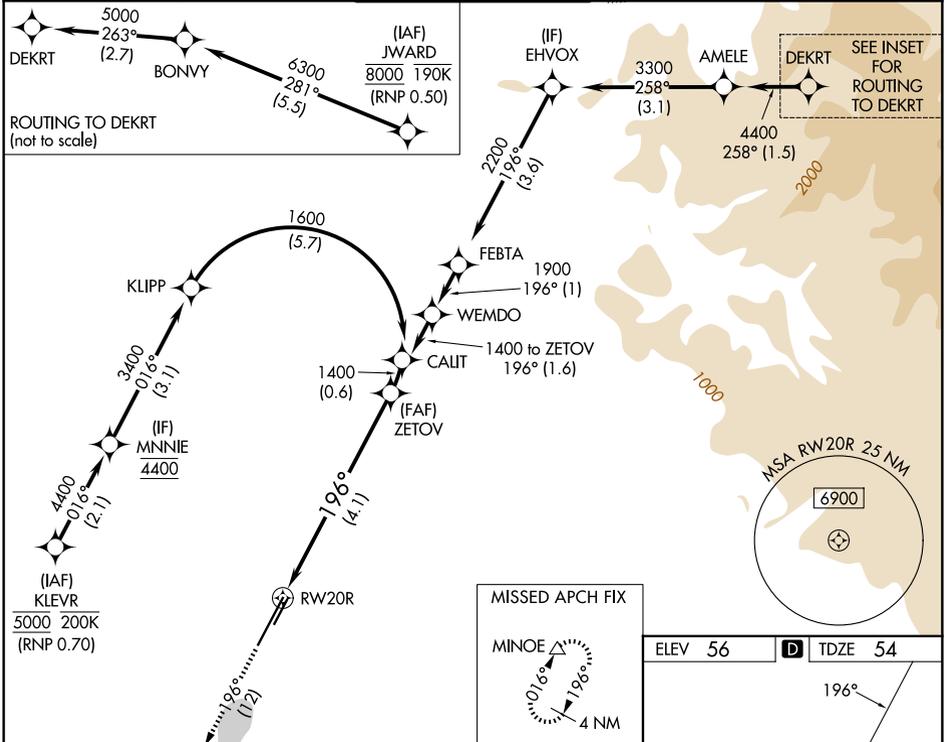

|                               |            |   |                    |
|-------------------------------|------------|---|--------------------|
| 3000<br>↑<br>fr 196°          | MINOE<br>△ | VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).<br>See planview for multiple IF locations. | ZETOV<br>1400      |
| RW20R                         |            | 196°  | 1400               |
|                               |            | 4.1 NM  | GP 3.00°<br>TCH 51 |
| CATEGORY                      | A          | B   | C                  |
| RNP 0.11 DA                   |            | 376/26  | 322 (400-½)        |
| RNP 0.15 DA                   |            | 562/55  | 508 (600-1)        |
| RNP 0.30 DA                   |            | 618-1¼  | 564 (600-1¼)       |
| <b>AUTHORIZATION REQUIRED</b> |            |   |                    |

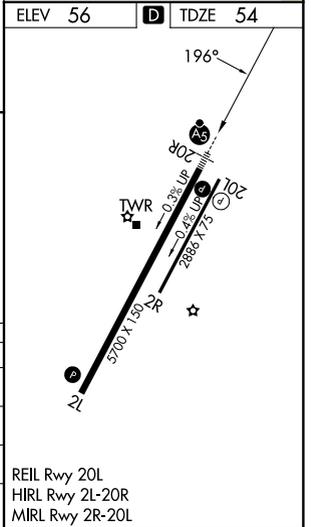

SW-3, 19 MAR 2026 to 16 APR 2026

SW-3, 19 MAR 2026 to 16 APR 2026