



WAAS CH <b>40015</b> <b>W28A</b>	APP CRS <b>277°</b>	Rwy Ldg TDZE Apt Elev	<b>9351</b> <b>50</b> <b>50</b>
--	------------------------	-----------------------------	---------------------------------------

# RNAV (GPS) Z RWY 28

SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH.		MISSED APPROACH: Climb to 2600 direct TILEE and hold.	
<p>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).</p>			

ATIS <b>123.75</b>	SAVANNAH APP CON* <b>125.3 371.875</b>	SAVANNAH TOWER* <b>125.975 (CTAF) 257.8</b>	GND CON <b>121.9 348.6</b>	UNICOM <b>122.95</b>
-----------------------	---	--	-------------------------------	-------------------------

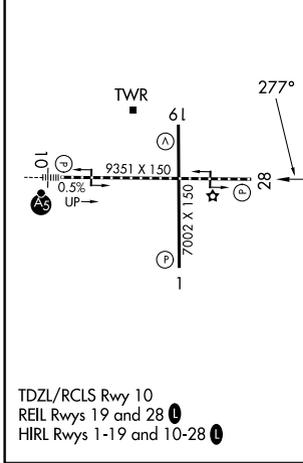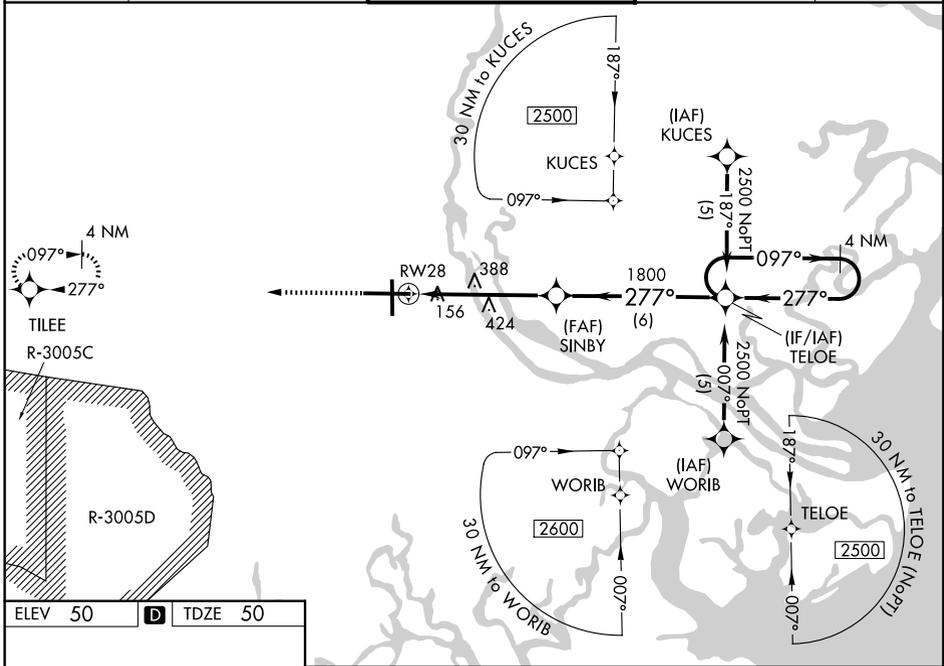

2600	TILEE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).	TELOE	4 NM Holding Pattern
	*RNAV only.			
		SINBY 1800		
		RWY 28		
		1.8 NM	3.5 NM	6 NM
				GP 3.00° TCH 52

CATEGORY	A	B	C	D
LPV DA		307-1	257 (300-1)	
LNAV/VNAV DA		431-1¼	381 (400-1¼)	
LNAV MDA	680-1	630 (700-1)	680-1¾	630 (700-1¾)
CIRCLING	680-1	630 (700-1)	740-2 690 (700-2)	740-2¼ 690 (700-2¼)