

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 42722 W04A | APP CRS 040° | Rwy Ldg TDZE Apf Elev | 7001 338 378 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 4

SCHENECTADY COUNTY (SCH)



RNP APCH - GPS.

▼ Circling Rwy 10 NA at night. Baro-VNAV and VDP NA when using Albany altimeter setting.
▲ Rwy 4 helicopter visibility reduction below 3/4 SM NA. Inop table does not apply to LPV.
 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
 When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 621 feet, LNAV/VNAV DA to 638 feet, and increase all MDAs 40 feet. For inop ALS, increase LNAV/VNAV all Cats visibility to 3/8 SM and LNAV Cats A/B to 1 SM and Cats C/D to 1 1/8 SM. For inop ALS when using Albany altimeter setting, increase LPV all Cats visibility to 3/8 SM, increase LNAV/VNAV all Cats to 3/8 SM, increase LNAV Cats A/B visibility to 1 SM, and Cats C/D to 1 1/8 SM.




MISSED APPROACH:
Climb to 3000 direct
MULXI and hold.

| | | | | |
|--------------------------|--|--|-------------------------|-------------------------|
| AWOS-3 119.275 | ALBANY APP CON 132.825 263.075 | SCHENECTADY TOWER * 121.3 (CTAF) 321.1 | GND CON 121.9 | UNICOM 122.95 |
|--------------------------|--|--|-------------------------|-------------------------|

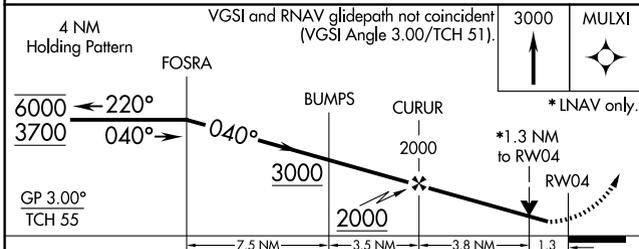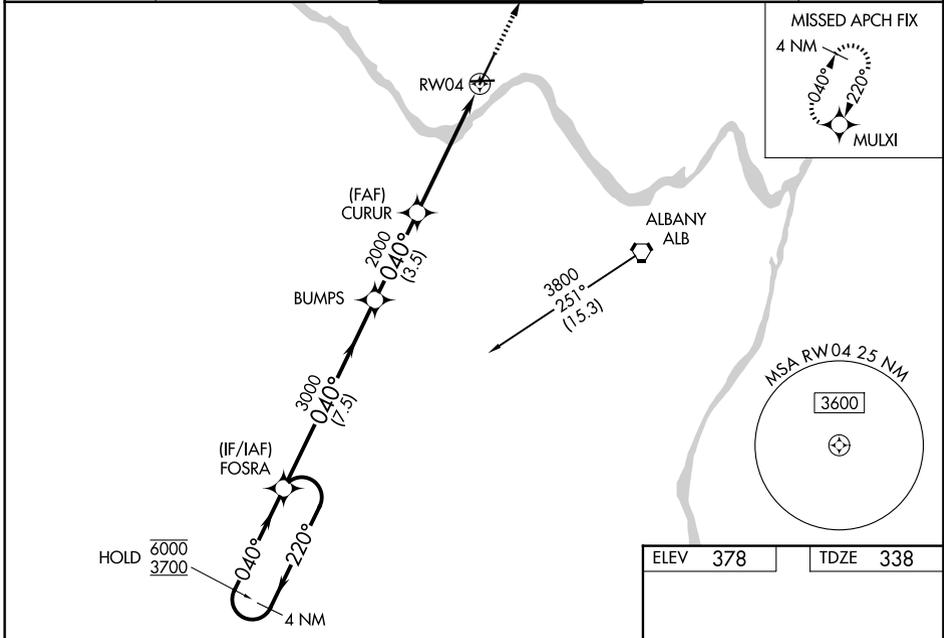

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|-------------------------------|------------------------|
| LPV DA | | 588-3/4 | 250 (300-3/4) | |
| LNAV/VNAV DA | | 605-3/4 | 267 (300-3/4) | |
| LNAV MDA | 800-3/4 | 462 (500-3/4) | 800-1 | 462 (500-1) |
| CIRCLING | 880-1 502 (600-1) | 940-1 562 (600-1) | 1120-2 1/4 742 (800-2 1/4) | 1320-3 942 (1000-3) |

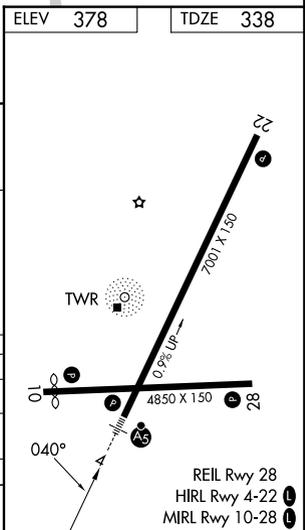

NE-2, 19 MAR 2026 to 16 APR 2026

NE-2, 19 MAR 2026 to 16 APR 2026