


WAAS CH 90211 W31A	APP CRS 313°	Rwy Ldg TDZE Apt Elev	9002 1096 1098
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

RNAV (GPS) RWY 31



SIoux GATEWAY/BRIG GENERAL BUD DAY FLD (SUX)

RNP APCH-GPS.		MISSED APPROACH: Climb to 3500 direct VOGYU and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS increase LPV Cat E visibility to RVR 4000; increase LNAV/VNAV all Cats visibility to 1 3/8 SM and LNAV Cats C/D/E visibility to 1 3/8 SM. # RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 119.45 270.8	SIoux CITY APP CON * 124.6 307.0	SIoux CITY TOWER * 118.7 (CTAF) 0 254.3	GND CON 121.9 348.6	UNICOM 122.95
-----------------------------	--------------------------------------------	---------------------------------------------------	-------------------------------	-------------------------

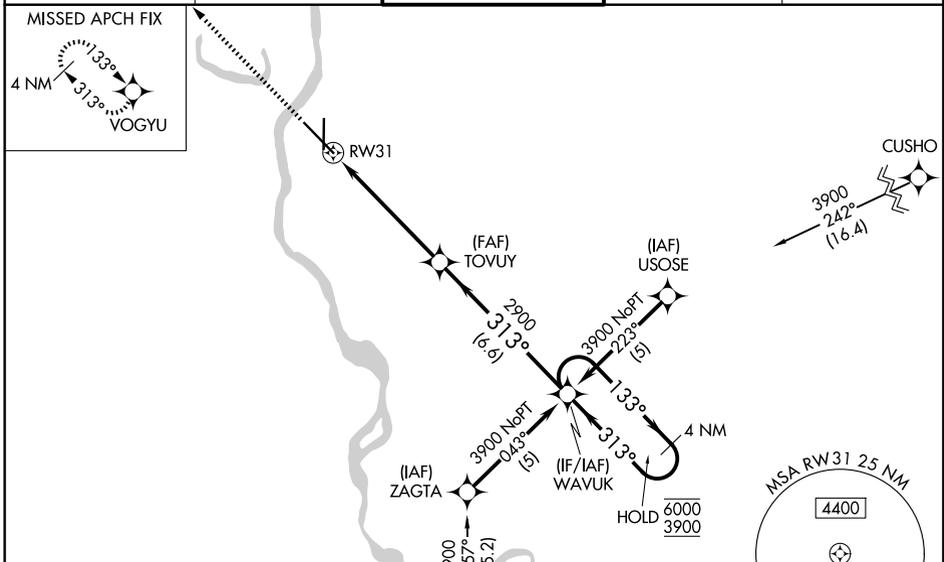

ELEV 1098	D	TDZE 1096
-----------	----------	-----------

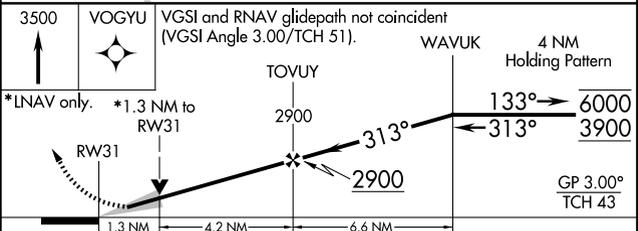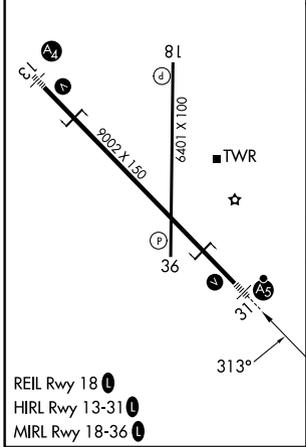

CATEGORY	A	B	C	D	E
LPV DA#	1296/24 200 (200-1/2)				
LNAV/VNAV DA	1596/50 500 (500-1)				
LNAV MDA	1560/24	464 (500-1/2)	1560/50 464 (500-1)		
CIRCLING	1640-1 542 (600-1)	1700-1 602 (700-1)	1700-1 3/4 602 (700-1 3/4)	1860-2 1/2 762 (800-2 1/2)	2000-3 902 (1000-3)

NC-3, 19 MAR 2026 to 16 APR 2026

NC-3, 19 MAR 2026 to 16 APR 2026