




LOC I-JOU 111.1	APP CRS 210°	Rwy Ldg TDZE Apt Elev	8999 1430 1430
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 21


JOE FOSS FLD (FSD)

<p>For inop ALS, increase S-LOC 21 Cats C/D visibility to 1 7/8 SM and S-LOC 21 WADRI fix minimums Cats C/D visibility to RVR 5500.</p> <p>-30°C</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 3400 then right turn direct FSD VORTAC and hold.</p>		
			<p>ATIS 126.6</p>	<p>SIoux FALLS APP CON * 125.8 284.725</p>

ATIS 126.6	SIoux FALLS APP CON * 125.8 284.725	SIoux FALLS TOWER * 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
----------------------	---	--	-------------------------------	-------------------------

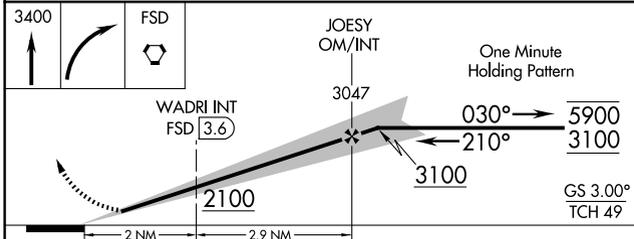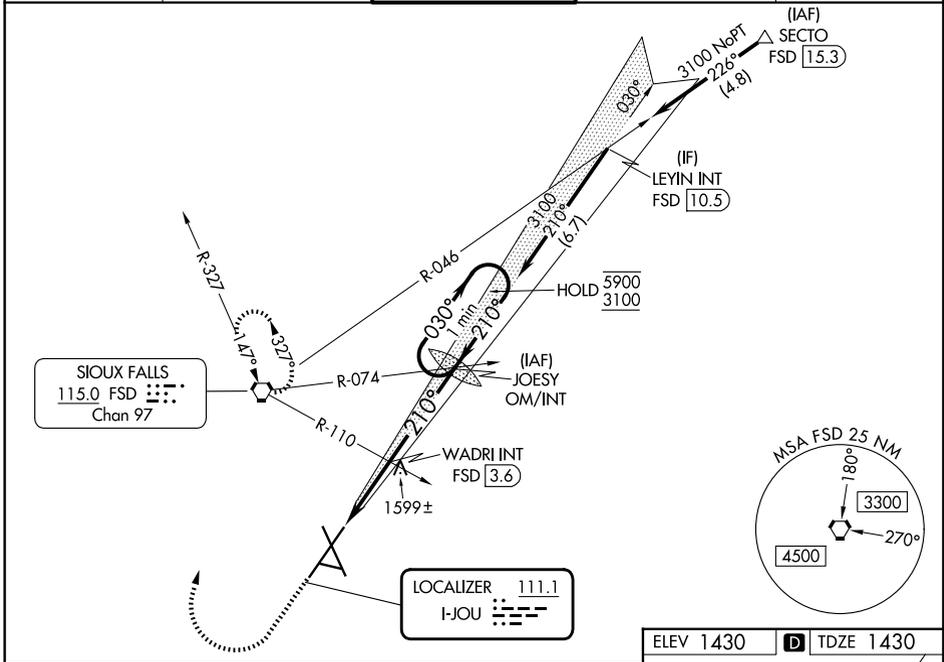

CATEGORY	A	B	C	D
S-ILS 21	1630/18		200 (200-1/2)	
S-LOC 21	2100/24	670 (700-1/2)	2100-1 1/2	670 (700-1/2)
CIRCLING	2100-1	670 (700-1)	2100-1 7/8	2200-2 1/2
WADRI FIX MINIMUMS				
S-LOC 21	1800/24	370 (400-1/2)	1800/35	370 (400-5/8)
CIRCLING	1980-1	550 (600-1)	2060-1 3/4	2200-2 1/2
			630 (700-1 3/4)	770 (800-2 1/2)

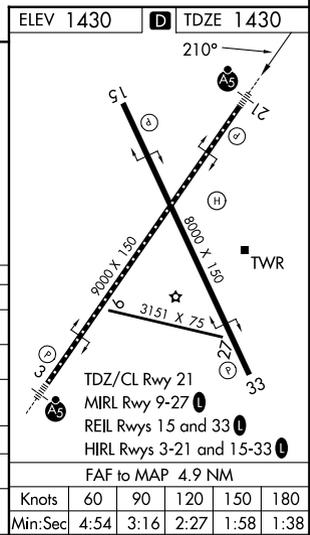

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38