



WAAS CH <b>99323</b> <b>W21A</b>	APP CRS <b>210°</b>	Rwy Ldg TDZE Apt Elev	<b>8999</b> <b>1430</b> <b>1430</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 21


JOE FOSS FLD (FSD)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 4000 direct KASME and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.			

ATIS <b>126.6</b>	SIoux FALLS APP CON* <b>125.8 284.725</b>	SIoux FALLS TOWER* <b>118.3 (CTAF) 0 257.8</b>	GND CON <b>121.9 348.6</b>	UNICOM <b>122.95</b>
----------------------	--	---	-------------------------------	-------------------------

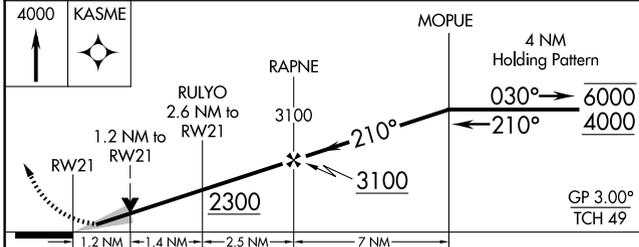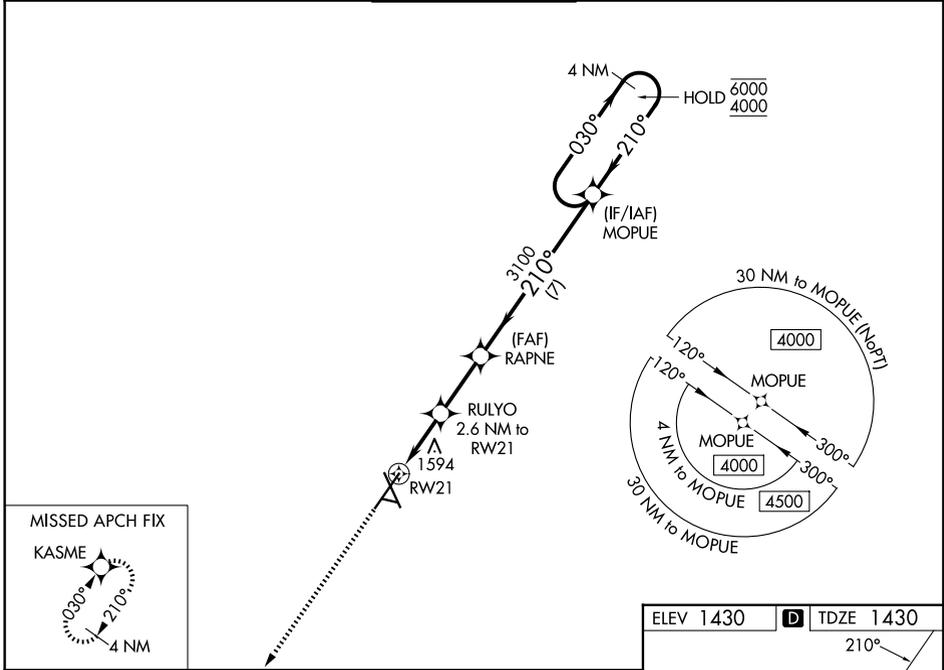

CATEGORY	A	B	C	D
LPV DA	1630/18		200 (200-½)	
LNAV/VNAV DA	1704/24		274 (300-½)	
LNAV MDA	1860/24 430 (500-½)		1860/40 430 (500-¾)	
CIRCLING	1980-1 550 (600-1)		2060-1¾ 630 (700-1¾) 2200-2½ 770 (800-2½)	

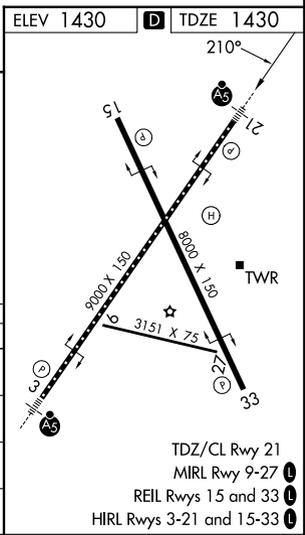

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026

TDZ/CL Rwy 21  
MIRL Rwy 9-27  
REIL Rws 15 and 33  
HIRL Rws 3-21 and 15-33