

WAAS CH 50108 W27A	APP CRS 274°	Rwy Ldg 8412 TDZE 774 Apt Elev 798
--	------------------------	---

RNAV (GPS) RWY 27L

SOUTH BEND INTL (SBN)


RNP APCH - GPS

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Circling to Rwy 27R NA at night. For inop ALS, increase LNAV Cat C/D visibility to 1 1/8 SM.





MISSED APPROACH: Climb to 2600 direct TOKOC and hold.

ATIS 120.675	SOUTH BEND APP CON★ 118.55 257.8	SOUTH BEND TOWER★ 135.675 (CTAF) 0 257.8	GND CON 121.7
------------------------	--	--	-------------------------

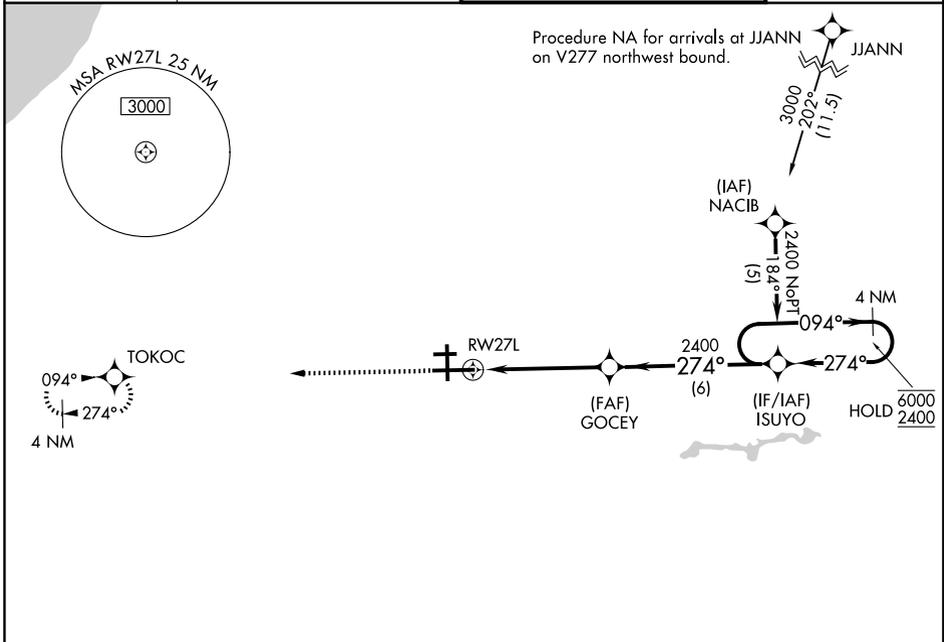

ELEV 798	D	TDZE 774
----------	----------	----------

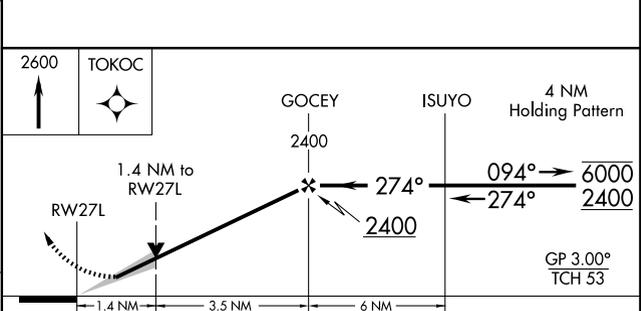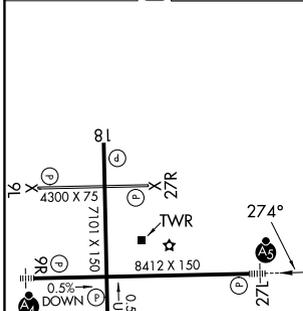

CATEGORY	A	B	C	D
LPV DA		1030/24	256 (300-1/2)	
LNAV/VNAV DA		1160/40	386 (400-3/4)	
LNAV MDA	1260/24	486 (500-1/2)	1260/50	486 (500-1)
CIRCLING	1280-1	482 (500-1)	1440-1 3/4 642 (700-1 1/4)	1520-2 1/4 722 (800-2 1/4)

HIRL Rwy 9R-27L **Ⓛ**
MIRL Rwy 18-36 **Ⓛ**
MIRL Rwy 9L-27R **Ⓛ**