


WAAS CH <b>87010</b> <b>W29A</b>	APP CRS <b>294°</b>	Rwy Ldg <b>8650</b> TDZE <b>32</b> Apt Elev <b>33</b>
--	------------------------	---

# RNAV (GPS) RWY 29R



STOCKTON METRO (SCK)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 2700 direct HAXEK and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to RVR 4500. #RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS <b>118.25</b>	NORCAL APP CON <b>123.85 278.3</b> (SE-NW) <b>125.1 363.2</b> (N-SE)	STOCKTON TOWER * <b>120.3</b> (CTAF) <b>0 239.0</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
-----------------------	--	--	-------------------------	-------------------------

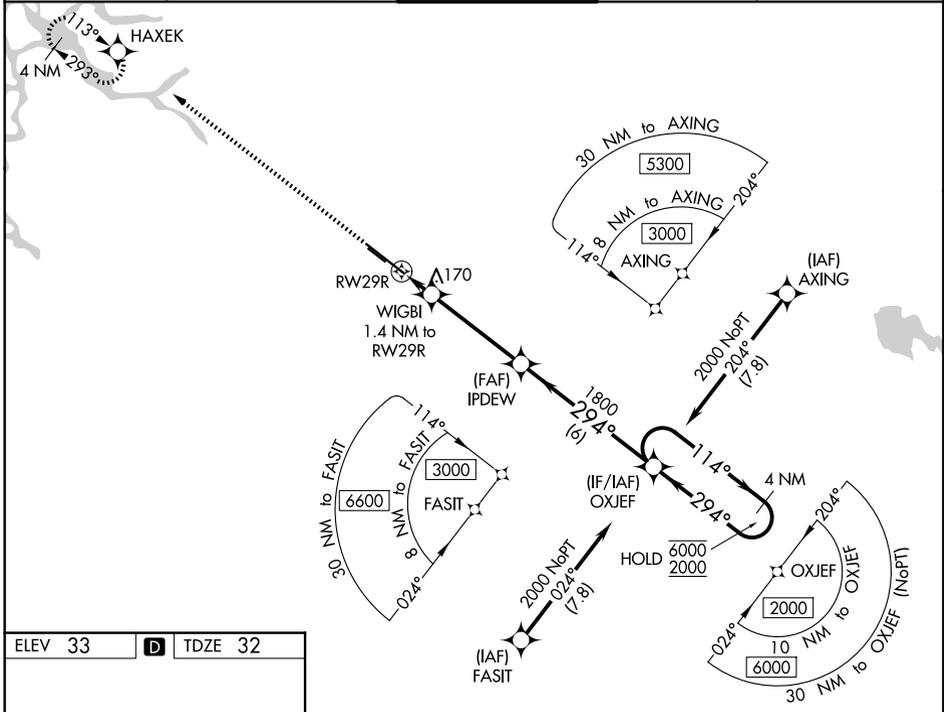

ELEV 33	<b>D</b>	TDZE 32
---------	----------	---------

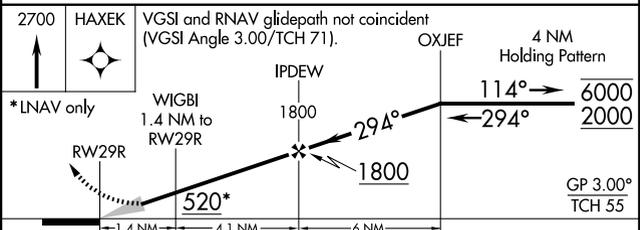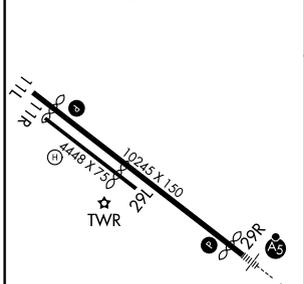

CATEGORY	A	B	C	D
LPV DA#		232/24	200 (200-½)	
LNAV/VNAV DA		320/24	288 (300-½)	
LNAV MDA	420/24	388 (400-½)	420/35	388 (400-⅝)
CIRCLING	500-1 467 (500-1)	540-1 507 (600-1)	640-1¾ 607 (700-1¾)	640-2 607 (700-2)

SW-2, 19 MAR 2026 to 16 APR 2026

SW-2, 19 MAR 2026 to 16 APR 2026