

WAAS CH 53733 W36A	APP CRS 005°	Rwy Ldg TDZE Apt Elev	5108 624 624
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 36


CHERRY CAPITAL (TVC)

RNP APCH - GPS.


⚠ Baro-VNAV NA when using ACB altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received use ACB altimeter setting: increase all DA 51 feet and all MDA 60 feet, increase LNAV/VNAV all Cats and Circling Cat C visibilities ¼ SM, and increase LPV all Cats, LNAV Cat C/D and Circling Cat D visibilities ½ SM. Helicopter visibility reduction below ¼ SM NA.

MISSED APPROACH:
Climb to 1400 then climbing right turn to 3000 direct TIDDU and hold.

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER * 124.2(CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

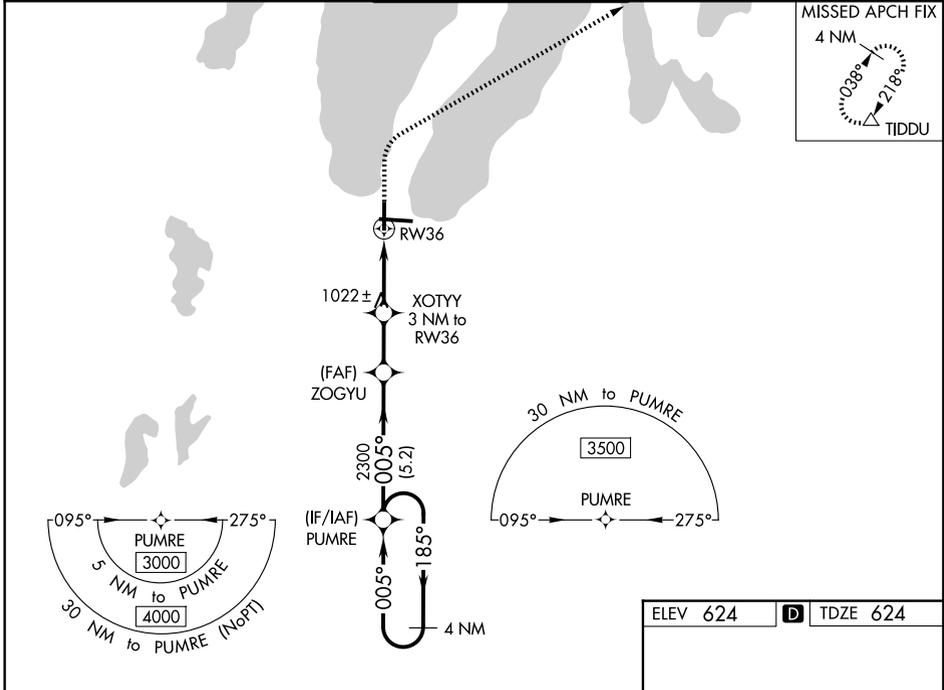

4 NM VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 53). Holding Pattern		1400	3000	TIDDU
3000	← 185°	→ 005°	→ 005°	△
GP 3.00° TCH 48		2300	1620	RW36
	5.2 NM	2.1 NM	3 NM	
CATEGORY	A	B	C	D
LPV DA	899-7/8		275 (300-7/8)	
LNAV/VNAV DA	1146-1¼		522 (600-1¼)	
LNAV MDA	1280-1	656 (700-1)	1280-17/8	656 (700-17/8)
CIRCLING	1280-1	656 (700-1)	1500-2½ 876 (900-2½)	1720-3 1096 (1100-3)

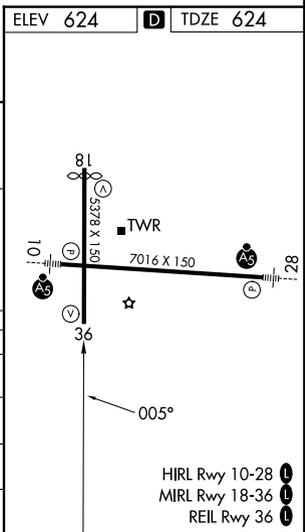

HIRL Rwy 10-28
MIRL Rwy 18-36
REIL Rwy 36

EC-1, 19 MAR 2026 to 16 APR 2026

EC-1, 19 MAR 2026 to 16 APR 2026