

ILS RWY 21L (CAT II)

LOC I-SUU 110.1	APCH CRS 215°	Rwy Idg 10,995 TDZE 58 Arprt Elev 63
---------------------------	-------------------------	---

[USAF]

TRAVIS AFB (KSUU)


RNAV1 - GPS or RADAR required

RADAR required for CAT E aircraft for full procedure off of SEATO.





MISSED APPROACH: Climb to 2200 then climbing right turn to 4500 direct SEATO and hold, continue climb in hold to 4500.

ATIS 135.55 292.125	APP CON 119.9 322.325 (S) 126.6 281.45 (N)	TOWER 120.75 254.4	GND CON 121.8 289.4
-------------------------------	--	------------------------------	-------------------------------

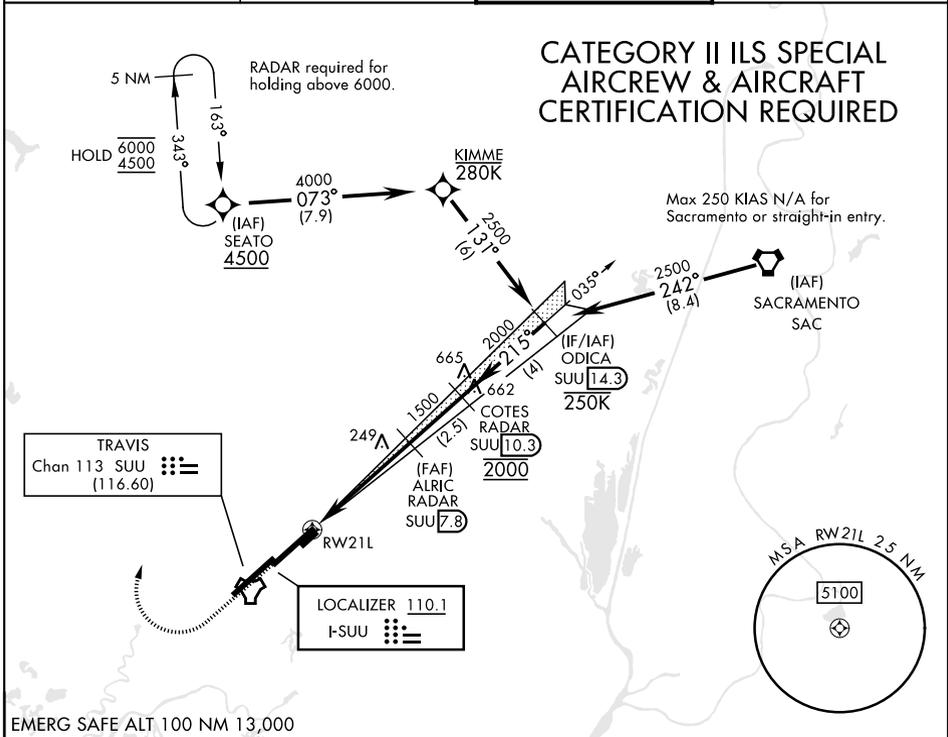

EMERG SAFE ALT 100 NM 13,000

2200	4500	SEATO	VGSI and glidepath not coincident (VGSI Angle 2.80/TCH 75).	ELEV 63	TDZE 58
------	------	-------	---	---------	---------

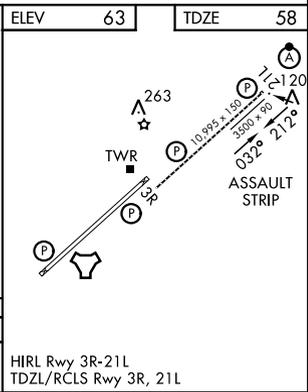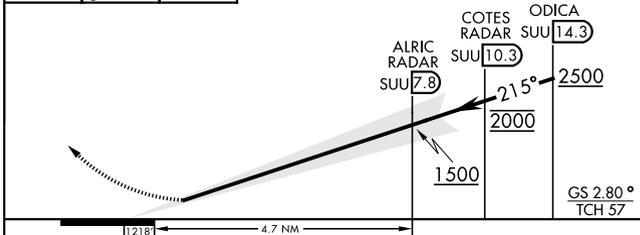

CATEGORY	A	B	C	D	E
S-ILS 21L	RA 83/12		100	DA 158	

HIRL Rwy 3R-21L
TDZL/RCLS Rwy 3R, 21L

ILS RWY 21L (CAT II)

SW-2, 19 MAR 2026 to 16 APR 2026

SW-2, 19 MAR 2026 to 16 APR 2026