

|                         |                        |                             |   |
|-------------------------|------------------------|-----------------------------|---|
| WAAS<br>CH <b>72932</b> | APP CRS<br><b>081°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>6330</b><br><b>589</b><br><b>595</b> |
|-------------------------|------------------------|-----------------------------|---|

# RNAV (GPS) RWY 8


SAN MARCOS RGNL (HYI)

RNP APCH.

**⚠** Circling NA for Cat E SW of Rwy 13-31; Rwy 8 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA with New Braunfels altimeter setting. When local altimeter setting not received, use New Braunfels altimeter setting and increase LPV DA to 882, LNAV/VNAV DA to 953 and increase all MDA 60 feet; increase LNAV Cat C/D/E and Circling Cat C/D visibility 1/4 SM.



**MISSED APPROACH:**  
Climb to 3000 direct QIMIB and hold.

|                        |                                       |  |                           |
|------------------------|---------------------------------------|--|---------------------------|
| ATIS<br><b>120.825</b> | AUSTIN APP CON<br><b>119.0 370.85</b> | SAN MARCOS TOWER *<br><b>126.825 (CTAF)</b> <b>📻</b> | GND CON<br><b>120.125</b> |
|------------------------|---------------------------------------|--|---------------------------|

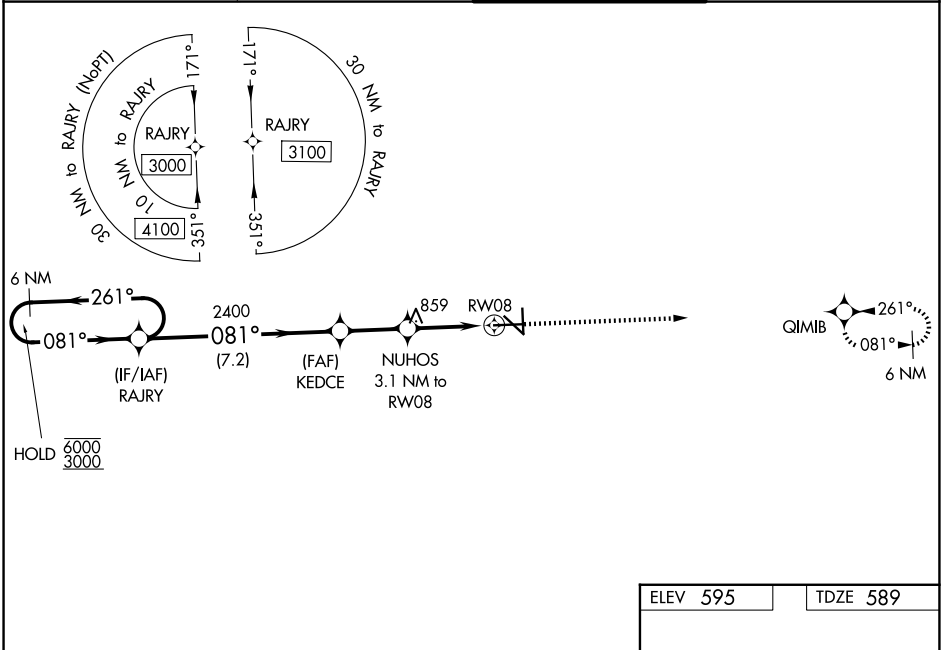

SC-3, 19 MAR 2026 to 16 APR 2026

SC-3, 19 MAR 2026 to 16 APR 2026

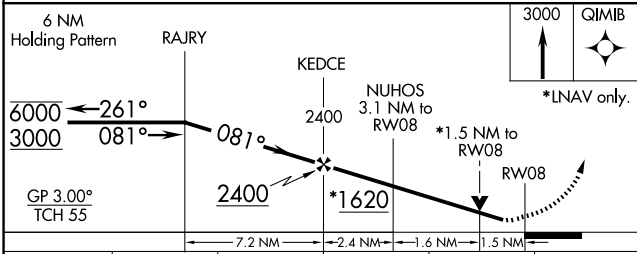

| CATEGORY     | A      | B           | C                       | D                       | E                       |
|--------------|--------|-------------|-------------------------|-------------------------|-------------------------|
| LPV DA       |        | 839-1       | 250 (300-1)             |                         |                         |
| LNAV/VNAV DA |        | 910-1       | 321 (400-1)             |                         |                         |
| LNAV MDA     | 1120-1 | 531 (600-1) | 1120-1½                 | 531 (600-1½)            |                         |
| CIRCLING     | 1120-1 | 525 (600-1) | 1240-1¾<br>645 (700-1¾) | 1320-2¼<br>725 (800-2¼) | 1340-2¾<br>745 (800-2¾) |

