


LOC/DME I-JAC <b>109.1</b> Chan 28	APP CRS <b>187°</b>	Rwy Ldg <b>6300</b> TDZE <b>6451</b> Apt Elev <b>6451</b>
--	------------------------	--

# ILS Y or LOC Y RWY 19


JACKSON HOLE (JAC)

RADAR required for procedure entry at MOSSS.		MALS	MISSED APPROACH: Climb to 14000 on JAC VOR/DME R-192 to KICNE INT/JAC VOR/DME 26.6 DME and hold, continue climb-in-hold to 14000.
<p>⚠ Circling NA for Cats A, B and C east of Rwy 1-19. Circling NA for Cat D. For inop ALS, increase SOSUE fix minimums S-LOC 19 Cats C and D visibility to 2½ SM. For inop ALS, increase S-LOC Cat C and D visibility to 3 SM.</p> <p>❄ -21°C</p>			

D-ATIS <b>120.625</b>	SALT LAKE CENTER <b>133.25 285.6</b>	JACKSON TOWER* <b>118.075 (CTAF) 0</b>	GND CON <b>124.55</b>	UNICOM <b>122.95</b>
--------------------------	---	---	--------------------------	-------------------------

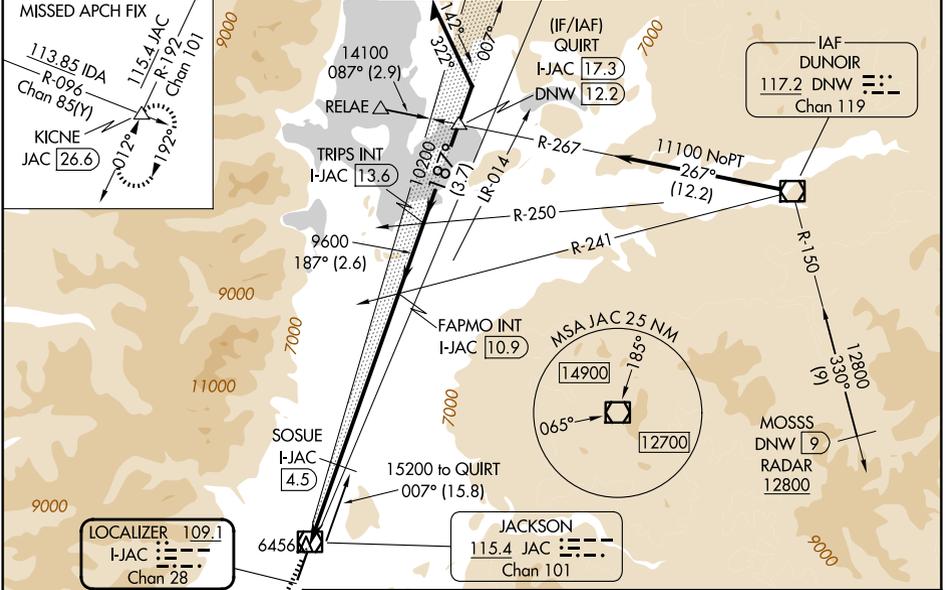

ELEV 6451	D	TDZE 6451	KICNE I-JAC 17.3	QUIRT I-JAC 12.2	Use I-JAC DME when on the localizer course.	QUIRT I-JAC 17.3	QUIRT DME 12.2	Remain within 10 NM
-----------	---	-----------	------------------	------------------	---	------------------	----------------	---------------------

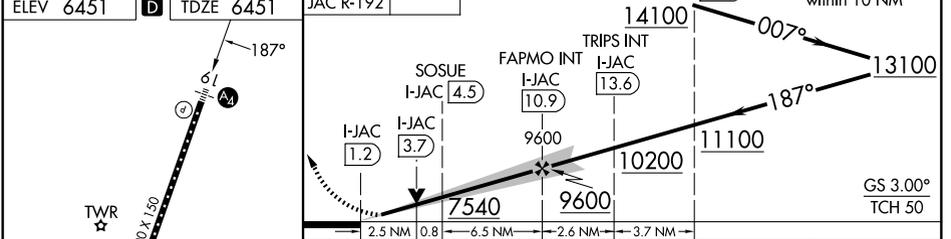

CATEGORY	A	B	C	D
S-ILS 19	7077-1½ 626 (700-1½)			
S-LOC 19	7540/55 1089 (1100-1)	7540-1¼ 1089 (1100-1¼)	7540-2½	1089 (1100-2½)
CIRCLING	7540-1¼ 1089 (1100-1¼)	7540-1½ 1089 (1100-1½)	7540-3 1089 (1100-3)	NA
SOSUE FIX MINIMUMS (DME REQUIRED)				
S-LOC 19	7300/40 849 (900-¾)	7300/55 849 (900-1)	7300-2	849 (900-2)
CIRCLING	7300-1¼	849 (900-1¼)	7400-2¾ 949 (1000-2¾)	NA

FAF to MAP 9.7 NM					
Knots	60	90	120	150	180
Min:Sec	9:42	6:28	4:51	3:53	3:14

NW-1, 19 MAR 2026 to 16 APR 2026

NW-1, 19 MAR 2026 to 16 APR 2026