


LOC I-SPI 109.5	APP CRS 043°	Rwy Ldg TDZE Apt Elev	7927 592 598
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

ADF Required.		MALSR		MISSED APPROACH: Climb to 1500 then climbing left turn to 2300 direct HUSKK LOM and hold.	
When local altimeter setting not received, use Lincoln altimeter setting and increase all DA 57 feet, all MDA 60 feet, increase S-LOC and Circling Cat C/D visibility ¼ mile. For inop ALS when using Lincoln altimeter setting, increase S-LOC 4 Cats C and D visibility to 1 3/8 SM. ASR *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Lincoln altimeter setting).					
ATIS 127.65 270.1	SAINT LOUIS APP CON 126.15 323.0	SPRINGFIELD TOWER * 121.3 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95	

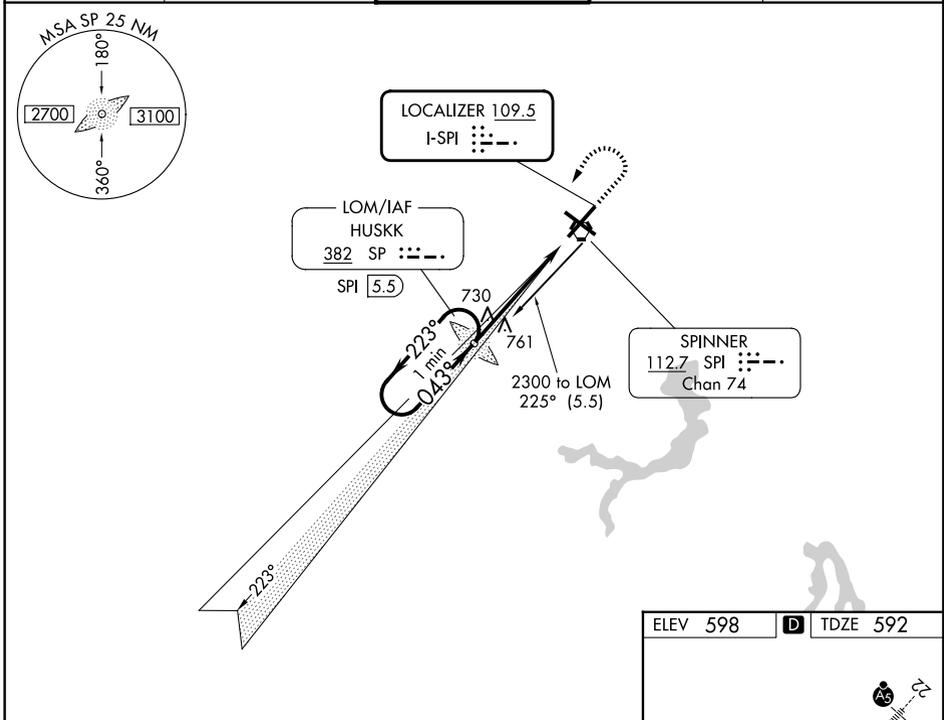

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026

One Minute Holding Pattern	SP LOM SPI 5.5	1500	2300	SP
2300 ← 223°	2297	↑	↶	
GS 3.00°	2300			
TCH 56				
← 5.1 NM →				
CATEGORY	A	B	C	D
S-ILS 4	* 792/24 200 (200-1/2)			
S-LOC 4	1020/24	428 (500-1/2)	1020/40	428 (500-3/4)
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2 1/4 762 (800-2 1/4)	1380-2 1/2 782 (800-2 1/2)

