

LOC/DME I-VNKG 110.5 Chan 42	APP CRS 175°	Rwy Ldg 9000 TDZE 492 Apt Elev 542
---	------------------------	--

ILS or LOC RWY 18L



AUSTIN-BERGSTROM INTL (AUS)

RNP APCH-GPS. From HOUKUM or JEDYE.
 RADAR required for procedure entry from DOFFS. DME required.
 Simultaneous approach authorized. For inop ALS, increase S-ILS-18L Cat E visibility to RVR 4000, and S-LOC-18L Cats C, D, and E visibility to RVR 5500.



MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 on heading 040° and CWK VORTAC R-088 to HOOKK/CWK 17 DME and hold.

D-ATIS 124.4	AUSTIN APP CON 127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	AUSTIN TOWER 121.0 281.5	GND CON 121.9 348.6
------------------------	---	------------------------------------	-------------------------------

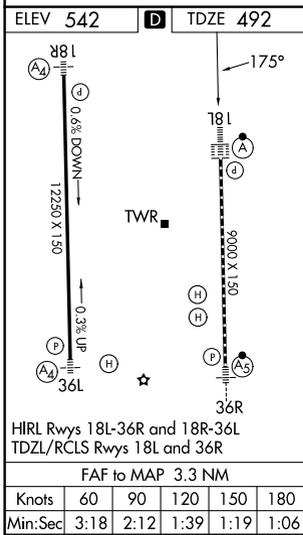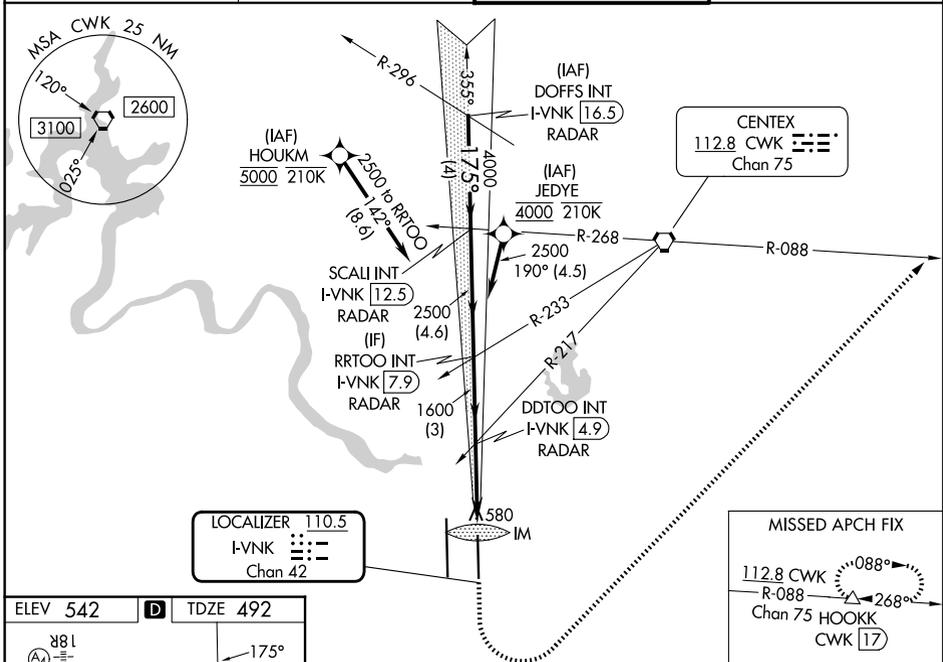

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 74).

DOFFS INT I-VNKG 16.5	SCALI INT I-VNKG 12.5	RRTOO INT I-VNKG 7.9	DDTOO INT I-VNKG 4.9	I-VNKG 2.5	I-VNKG 1.6
5000	4000	2500	1600	1600	IM
GS 3.00° TCH 61		hdg 040°			
4 NM		4.6 NM		3 NM	
3000		200 (200-1/2)		HOOKK	
CATEGORY A		CATEGORY B		CATEGORY C	
S-ILS 18L		692/18 200 (200-1/2)			
S-LOC 18L		840/24 348 (300-1/2)		840/30 348 (300-1/2)	
CIRCLING		1040-1 498 (500-1)		1120-1 578 (600-1)	
		1200-1 658 (700-1 3/4)		1200-2 658 (700-2)	
				NA	

SC-3, 19 MAR 2026 to 16 APR 2026

SC-3, 19 MAR 2026 to 16 APR 2026