

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>72818</b><br><b>W35A</b> | APP CRS<br><b>354°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5593</b><br><b>1067</b><br><b>1073</b> |
|--|------------------------|-----------------------------|---|





# RNAV (GPS) RWY 35

SHAWNEE RGNL (SNL)

**⚠** Baro-VNAV NA when using Seminole altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Seminole altimeter setting: increase LPV DA to 1357 feet; increase LNAV/VNAV DA to 1605 feet and visibility ¼ SM; increase all MDAs 40 feet and visibility Cat C ¼ SM.

**MISSED APPROACH:**  
Climb to 3000 direct FAVAN and hold.

|                            |   |                               |
|----------------------------|---|-------------------------------|
| AWOS-3PT<br><b>118.275</b> | OKE CITY APP CON<br><b>120.45 288.325</b> | UNICOM<br><b>122.7 (CTAF)</b> |
|----------------------------|---|-------------------------------|

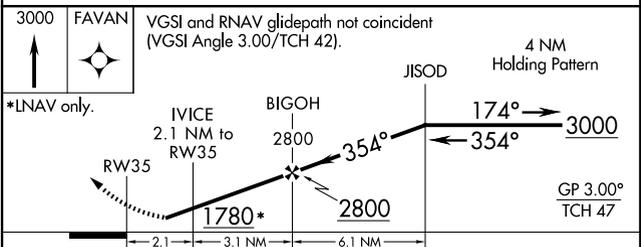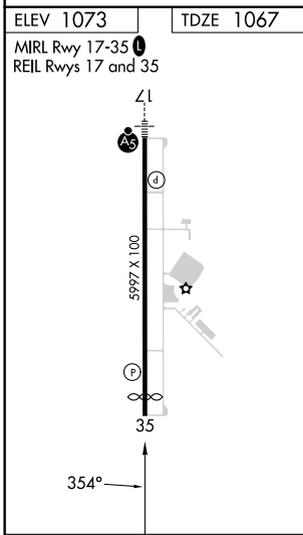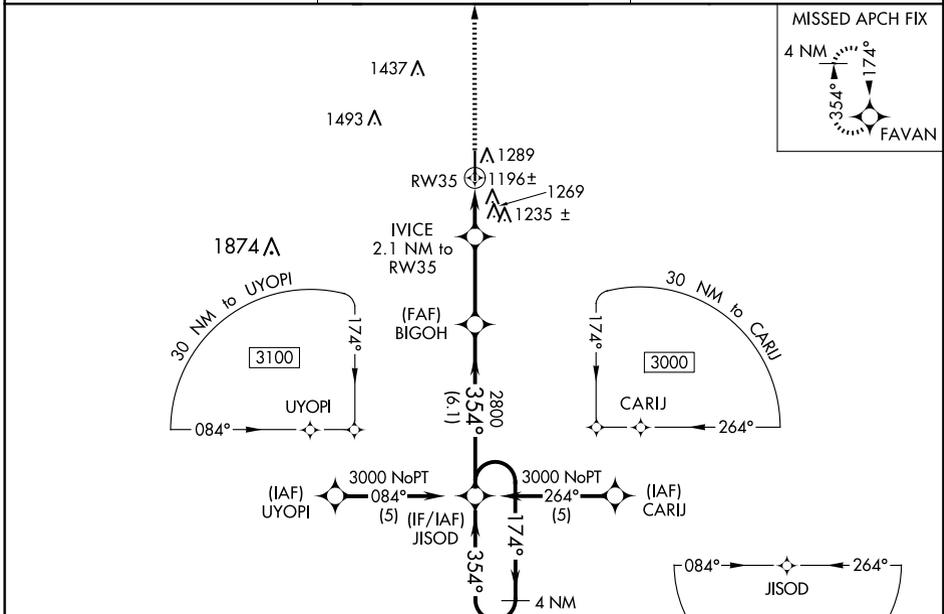

| CATEGORY          | A      | B           | C                       | D  |
|-------------------|--------|-------------|-------------------------|----|
| LPV DA            |        | 1317-1      | 250 (300-1)             | NA |
| LNAV/VNAV DA      |        | 1565-1¾     | 498 (500-1¾)            | NA |
| LNAV MDA          | 1520-1 | 453 (500-1) | 1520-1¼<br>453 (500-1¼) | NA |
| <b>C</b> CIRCLING | 1600-1 | 527 (600-1) | 1640-1½<br>567 (600-1½) | NA |

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026