



| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 62847 W14A | APP CRS 138° | Rwy Ldg TDZE Apt Elev | 5000 655 656 |
|--|------------------------|-----------------------------|---|



RNAV (GPS) RWY 14

COLUMBUS MUNI (BAK)


| | | | | | |
|---|---|---|-------------------------|--|-------------------------|
| RNP APCH - GPS. | | MISSED APPROACH: Climb to 2500 direct HUMOX and hold. | | | |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA ▲ below -16°C or above 54°C. | | | | | |
| AWOS-3 119.75 | INDIANAPOLIS APP CON 134.85 317.8 | COLUMBUS TOWER ★ 118.6 (CTAF) 0 | GND CON 121.6 | CLNC DEL 134.85 (When twr closed) | UNICOM 122.95 |

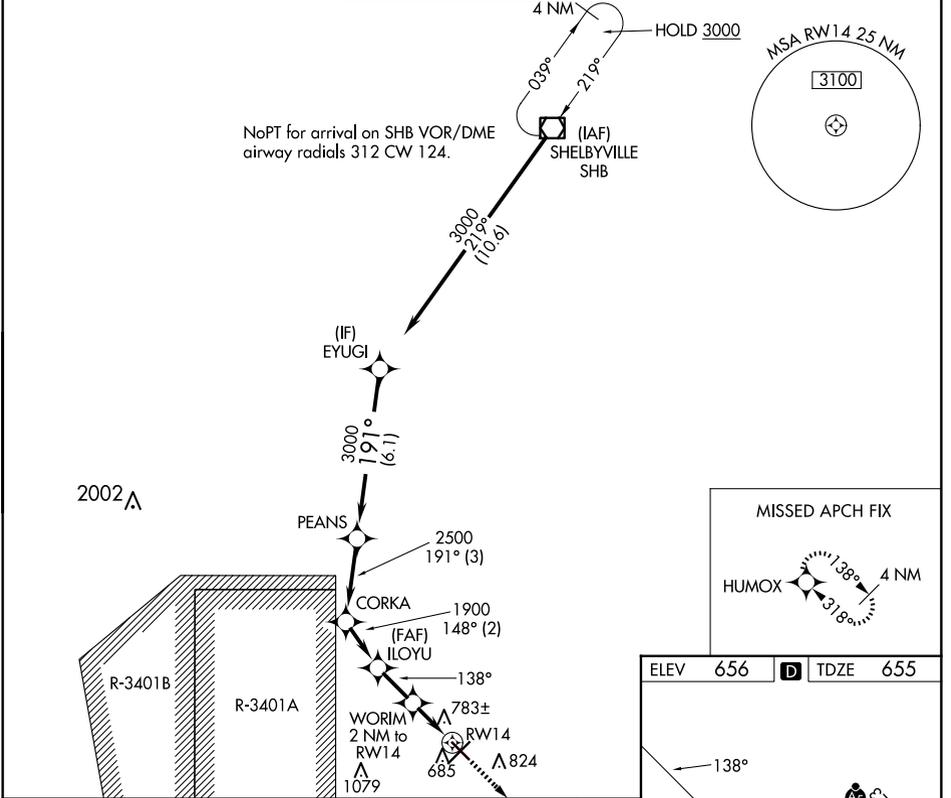

| | | |
|----------|---|----------|
| ELEV 656 | D | TDZE 655 |
|----------|---|----------|

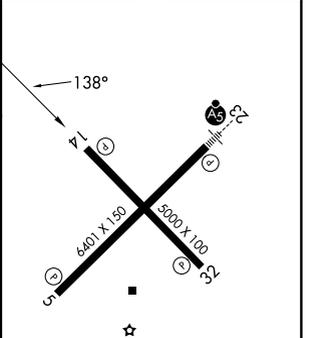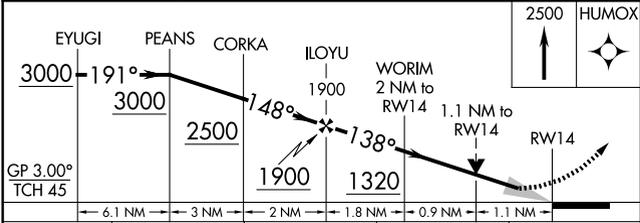

| | | | | |
|--------------|--------|-------------|-------------------------------|-------------------------------|
| CATEGORY | A | B | C | D |
| LPV DA | | 855-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 944-7/8 | 289 (300-7/8) | |
| LNAV MDA | 1040-1 | 385 (400-1) | 1040-1 1/8 | 385 (400-1 1/8) |
| CRCLING | 1140-1 | 484 (500-1) | 1200-1 1/2 544 (600-1 1/2) | 1400-2 1/2 744 (800-2 1/2) |

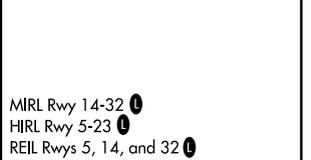

EC-2, 19 MAR 2026 to 16 APR 2026

EC-2, 19 MAR 2026 to 16 APR 2026