
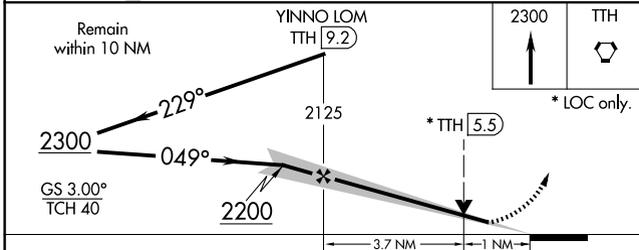



LOC I-HUF <b>109.7</b>	APP CRS <b>049°</b>	Rwy Ldg TDZE Apt Elev	<b>9020</b> <b>573</b> <b>589</b>
---------------------------	------------------------	-----------------------------	---

# ILS or LOC RWY 5

TERRE HAUTE RGNL (HUF)

ADF or DME required.		<p>VDP NA when using Paris altimeter setting. When local altimeter setting not received, use Paris altimeter setting and increase all DA 61 feet and all MDA 80 feet, increase S-LOC 5 Cats C/D visibility to RVR 4500. For inop ALS, increase S-LOC 5 Cat C/D visibility to RVR 5500, when using Paris altimeter setting increase S-ILS 5 all Cats visibilities to RVR 4500 and S-LOC Rwy 5 all Cats visibility 1/2 SM. **RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Paris altimeter setting.</p>		<p>MALSR</p>	<p>MISSED APPROACH: Climb to 2300 direct TTH VORTAC and hold.</p>
ATIS <b>127.5 269.375</b>	HULMAN APP CON <b>125.45 339.8</b>	HULMAN TOWER <b>134.725 322.475</b>	GND CON <b>121.6 348.6</b>		

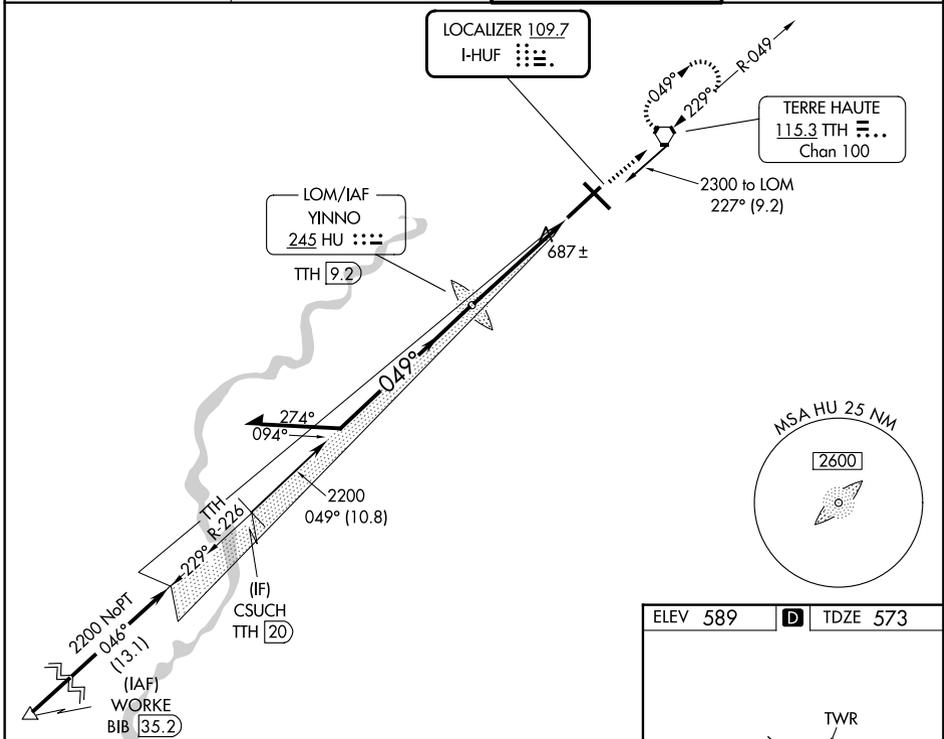

ELEV 589	D	TDZE 573			
REIL Rwy 14, 23 and 32					
HIRL Rwy 5-23 and 14-32					
FAF to MAP 4.7 NM					
Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34

EC-2, 19 MAR 2026 to 16 APR 2026

EC-2, 19 MAR 2026 to 16 APR 2026