

LIFRR TWO DEPARTURE(RNAV)

RNAV 1 - DME/DME/IRU or GPS.

RADAR required for non-GPS equipped aircraft.

TOP ALTITUDE:

4000

MIAMI DEP CON

126.05 251.1

D-ATIS

135.0

CLNC DEL

128.4



CPDLC

GND CON

121.4

FORT LAUDERDALE TOWER

119.3 257.8

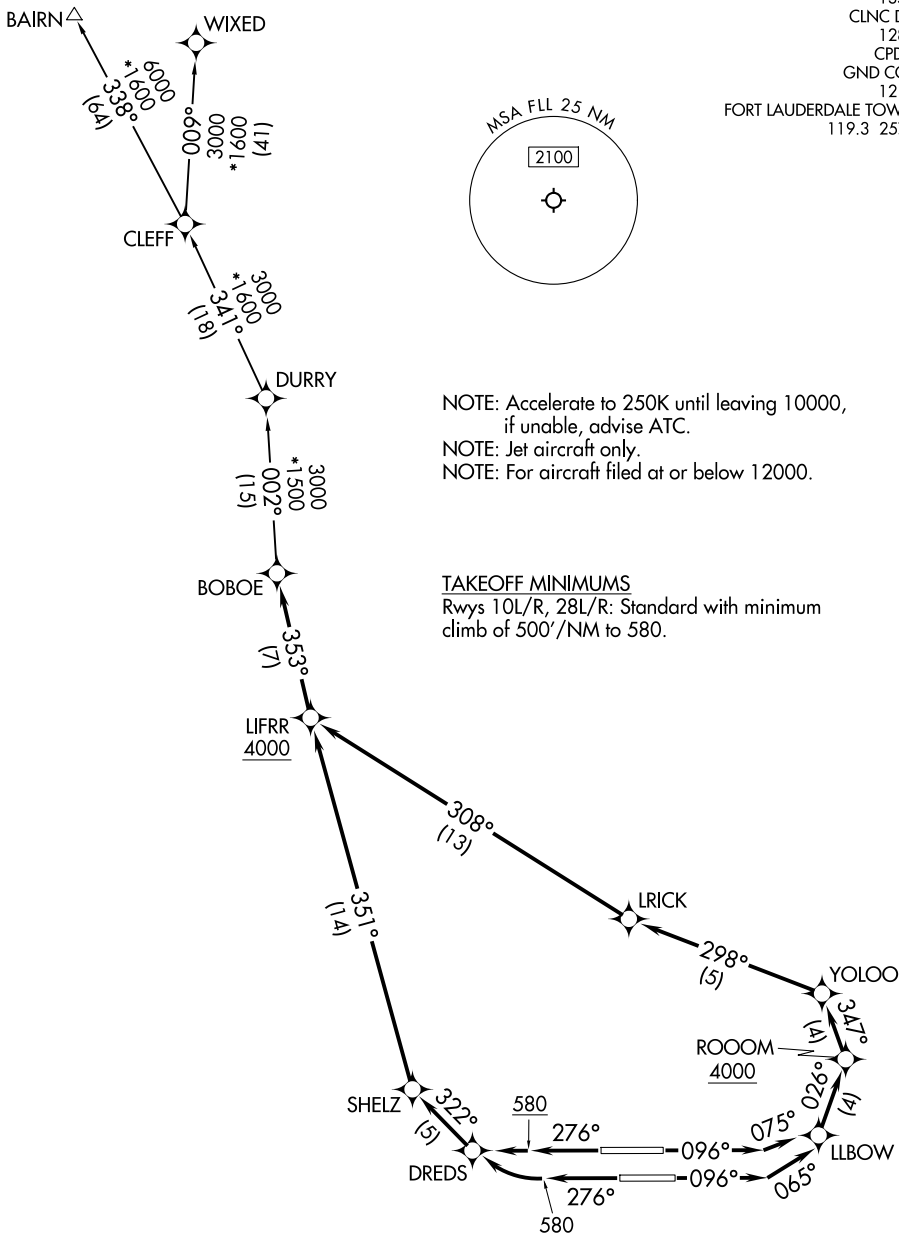

NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
 NOTE: Jet aircraft only.
 NOTE: For aircraft filed at or below 12000.

TAKEOFF MINIMUMS
 Rwy's 10L/R, 28L/R: Standard with minimum climb of 500'/NM to 580.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026