

WAAS	APP CRS	Rwy Idg	<b>5343</b>
CH <b>97421</b>	<b>053°</b>	TDZE	<b>124</b>
<b>W05A</b>		Apt Elev	<b>125</b>

# RNAV (GPS) RWY 5



LUMBERTON RGNL (LBT)

RNP APCH - GPS.


**⚠** When local altimeter setting not received, use Maxton altimeter setting: increase LPV DA to 383 feet; LNAV/VNAV DA to 594 feet and all visibility  $\frac{1}{4}$  SM; increase all MDAs 60 feet and LNAV visibility Cat C and Circling Cat C  $\frac{1}{4}$  SM. Baro-VNAV and VDP NA when using Maxton altimeter setting. Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below  $-15^{\circ}\text{C}$  or above  $54^{\circ}\text{C}$ .

**MISSED APPROACH:**  
Climb to 2000 direct WIVGA and hold.

ASOS <b>134.775</b>	FAYETTEVILLE APP CON <b>133.0 290.25</b>	UNICOM <b>122.8 (CTAF)</b> <b>📻</b>
------------------------	---	--

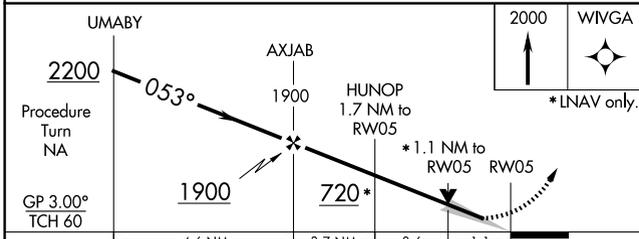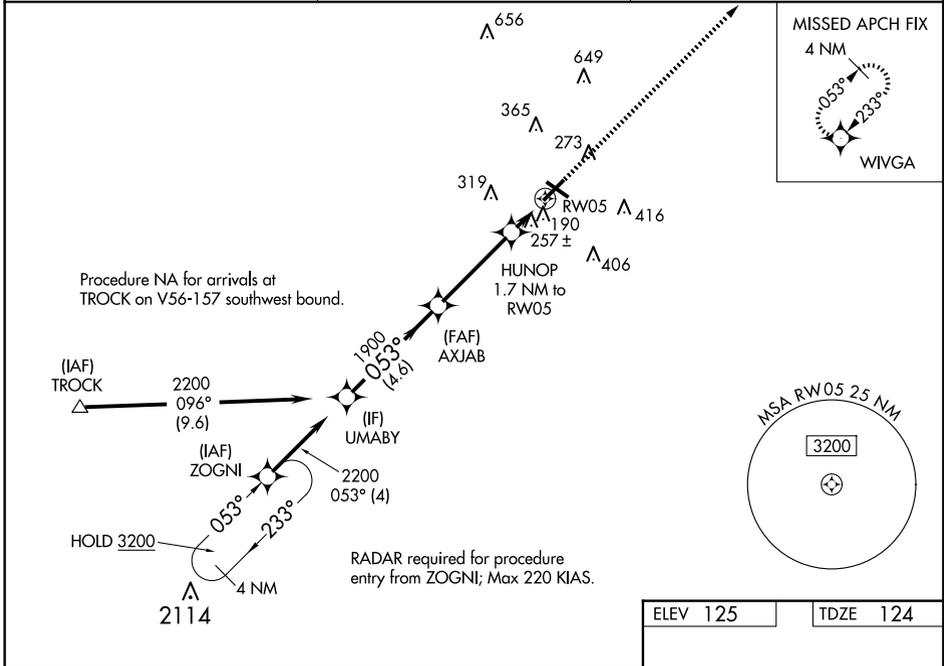

CATEGORY	A	B	C	D
LPV DA	327- $\frac{3}{4}$	203 (300- $\frac{3}{4}$ )		NA
LNAV/VNAV DA	538-1 $\frac{1}{8}$	414 (500-1 $\frac{1}{8}$ )		NA
LNAV MDA	520-1	396 (400-1)	520-1 $\frac{1}{8}$ 396 (400-1 $\frac{1}{8}$ )	NA
CIRCLING	660-1	535 (600-1)	720-1 $\frac{1}{2}$ 595 (600-1 $\frac{1}{2}$ )	NA

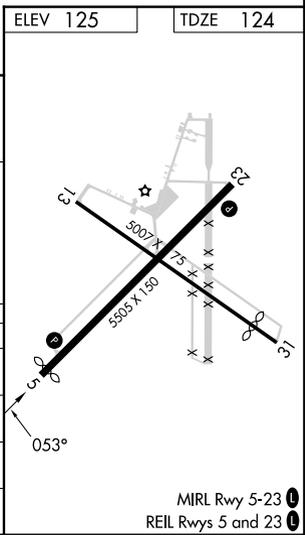

SE-2, 19 MAR 2026 to 16 APR 2026

SE-2, 19 MAR 2026 to 16 APR 2026