

| | | |
|--|------------------------|---|
| WAAS CH 69401 W17A | APP CRS 175° | Rwy Ldg 6002 TDZE 541 Apt Elev 548 |
|--|------------------------|---|

RNAV (GPS) RWY 17




COX FLD (PRX)

RNP APCH - GPS.


▼ Baro-VNAV and VDP NA when using SLR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 868 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1016 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
CUKBO and hold.

| | | |
|----------------------------|--|---------------------------------|
| AWOS-3PT 119.675 | FORT WORTH CENTER 124.875 370.95 | UNICOM 122.975 (CTAF) |
|----------------------------|--|---------------------------------|

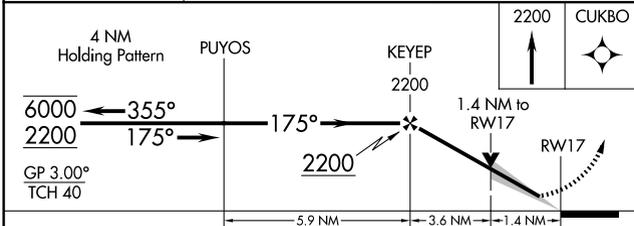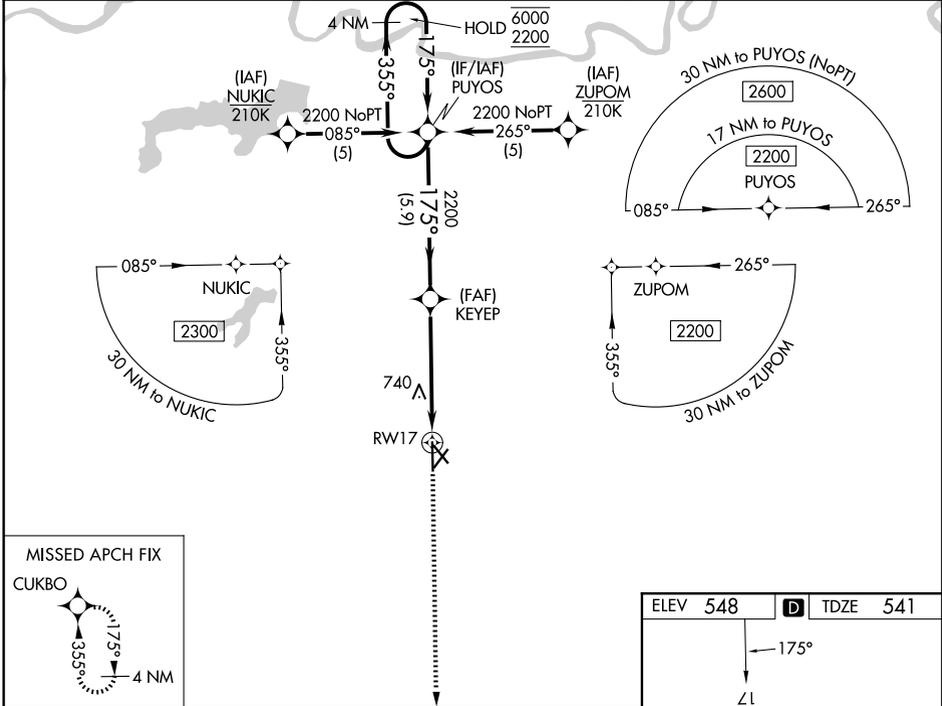

| CATEGORY | A | B | C | D |
|--------------|--------|-----------------------------------|--|--|
| LPV DA | | 791- ³ / ₄ | 250 (300- ³ / ₄) | |
| LNAV/VNAV DA | | 939-1 ¹ / ₈ | 398 (400-1 ¹ / ₈) | |
| LNAV MDA | 1040-1 | 499 (500-1) | 1040-1 ³ / ₈ | 499 (500-1 ³ / ₈) |
| CIRCLING | 1060-1 | 512 (600-1) | 1100-1 ¹ / ₂ 552 (600-1 ¹ / ₂) | 1220-2 ¹ / ₄ 672 (700-2 ¹ / ₄) |

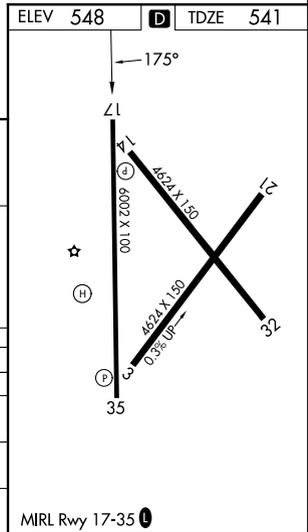

MRL Rwy 17-35

SC-2, 19 MAR 2026 to 16 APR 2026

SC-2, 19 MAR 2026 to 16 APR 2026