


WAAS CH <b>82633</b> <b>W05A</b>	APP CRS <b>054°</b>	Rwy Ldg <b>3601</b> TDZE <b>3199</b> Apt Elev <b>3204</b>
--	------------------------	--


# RNAV (GPS) RWY 5

RAPID CITY RGNL (RAP)

<p><b>⚠</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ellsworth AFB altimeter setting and increase all DA 25 feet and all MDA 40 feet. VDP and Baro-VNAV NA with Ellsworth AFB altimeter setting.</p>		<p>MISSED APPROACH: Climb to 5300 direct EWEBU and hold.</p>		
ASOS <b>118.525</b>	ELLSWORTH APP CON * <b>119.5 259.1</b>	RAPID CITY TOWER * <b>125.85 (CTAF) 0 257.8</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>

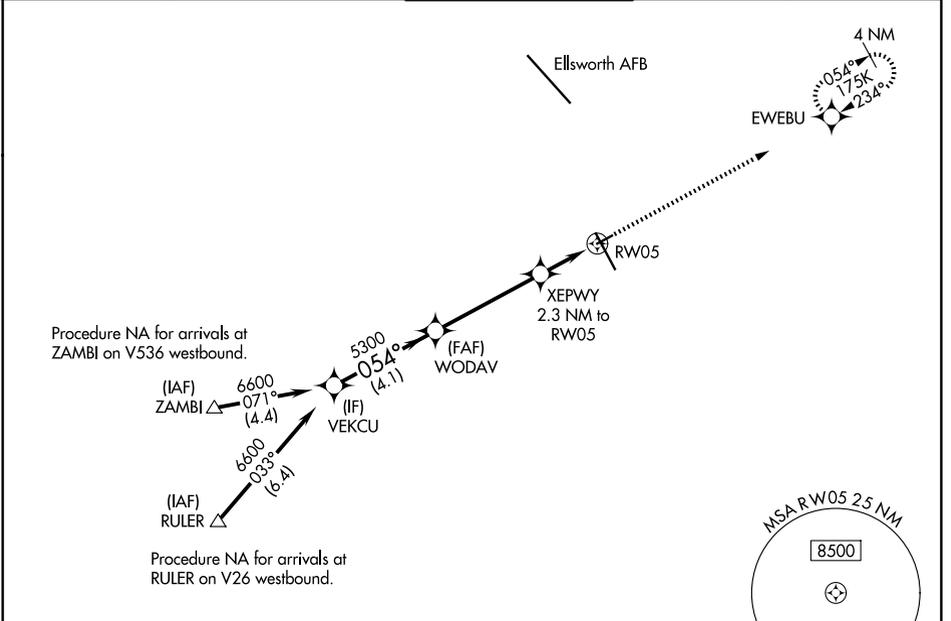

ELEV 3204	<b>D</b>	TDZE 3199
-----------	----------	-----------

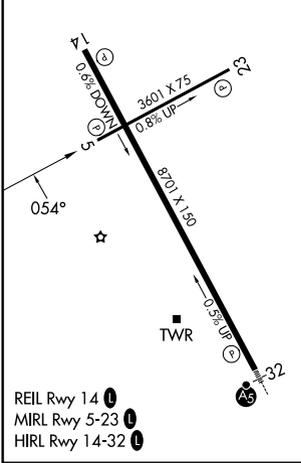

VEKCU	WODAV	XEPWY	EWEBU
6600	5300	5300	5300
GP 3.00°		*LNAV only.	
TCH 34		*0.9 NM to RW05	
4.1 NM		4.3 NM	
4.1 NM		1.4 NM	
4.1 NM		0.9 NM	
*3920		RW05	
CATEGORY	A	B	C
LPV DA	3449-1	250 (300-1)	NA
LNAV/VNAV DA	3449-1	250 (300-1)	NA
LNAV MDA	3500-1	301 (300-1)	NA
CIRCLING	3660-1	3840-1	NA
	456 (500-1)	636 (700-1)	

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026