

WAAS CH 65905 W24A	APP CRS 244°	Rwy Ldg TDZE 560 Apt Elev 569
--	------------------------	---

RNAV (GPS) RWY 24

NORTHEAST ALABAMA RGNL (GAD)

RNP APCH-GPS.


▼

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C .
When local altimeter setting is not received, use Anniston altimeter setting and increase LPV DA to 847 feet and all visibilities 1/8 SM; increase LNAV/VNAV DA to 1082 feet and all visibilities 1/8 SM; increase all MDAs 80 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C 1/2 SM. Baro-VNAV and VDP NA when using Anniston altimeter setting.

MISSED APPROACH: Climb to 3600 direct CEGON and on track 221° to STAMP and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	-----------------------------------

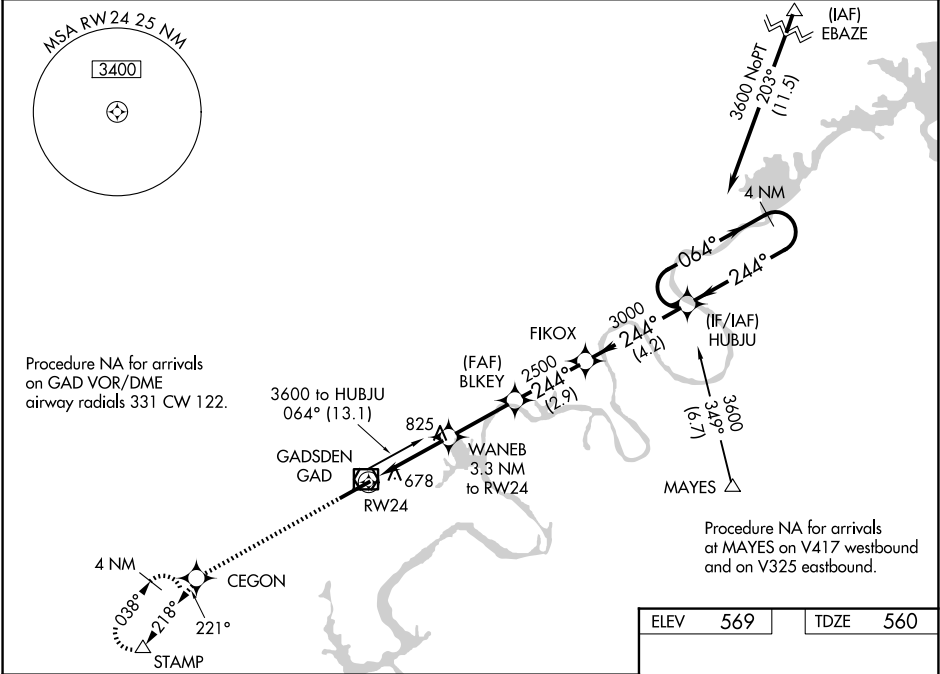

3600 ↑	CEGON ✱	tr 221°	STAMP △					
				WANE6 3.3 NM to RW24	2500	064° → ← 244° 3600		
				1.7 NM to RW24	1620	GP 3.00° TCH 43		
				1.7 NM	1.6 NM	2.7 NM	2.9 NM	
				4.2 NM				
CATEGORY	A		B		C		D	
LPV DA			781-3/4		221 (300-3/4)			
LNAV/ VNAV DA			1016-13/8		456 (500-13/8)			
LNAV MDA	1140-1	580 (600-1)	1140-15/8		580 (600-15/8)			
CIRCLING	1140-1	571 (600-1)	1440-2 1/2 871 (900-2 1/2)		1680-3 1111 (1200-3)			

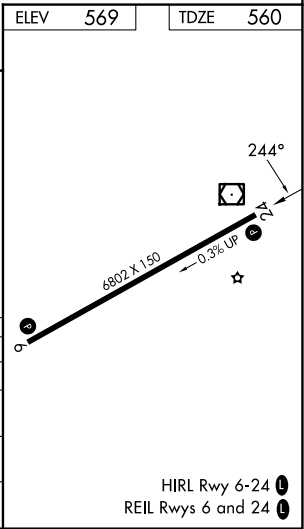

SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026