

| | | | |
|--|------------------------|---|-------------|
| WAAS CH 65706 W06A | APP CRS 064° | Rwy Ldg TDZE 569 Apt Elev 569 | 6802 |
|--|------------------------|---|-------------|

RNAV (GPS) RWY 6


NORTHEAST ALABAMA RGNL (GAD)

RNP APCH-GPS.

Baro-VNAV and VDP NA when using Anniston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C. When local altimeter not received, use Anniston altimeter setting and increase LPV DA to 835, LNAV/VNAV DA to 1040 and all MDA 80 feet; increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats 1/4 SM and increase LNAV Cats C/D and Circling Cat C visibility 1/4 SM.


MISSED APPROACH: Climb to 1300 then climbing left turn to 3500 direct SNEAR and hold.

| | | | |
|----------------------------|--|---------------------------------|---------------------------------|
| AWOS-3PT 127.825 | BIRMINGHAM APP CON 125.45 279.65 | CLNC DEL 120.05 257.7 | UNICOM 122.725 (CTAF) |
|----------------------------|--|---------------------------------|---------------------------------|

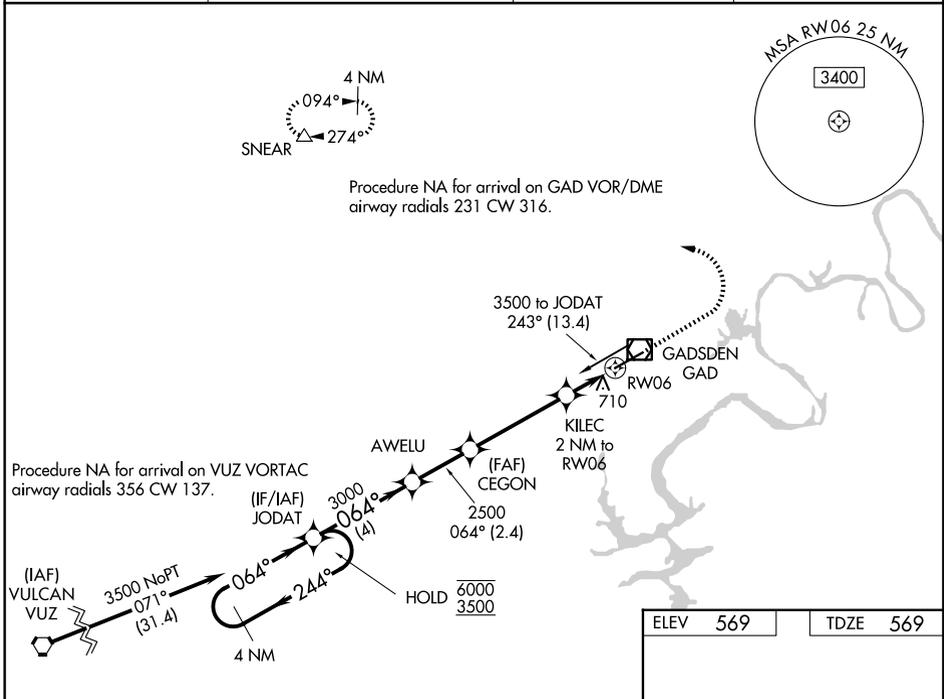

| | |
|----------|----------|
| ELEV 569 | TDZE 569 |
|----------|----------|

| CATEGORY | A | | B | | C | | D | |
|--------------|-----------|-------------|-----------------|-----------------|--------|---------------|-----|----|
| | LPV | DA | LPV | DA | LPV | DA | LPV | DA |
| LPV DA | 769-3/4 | | 200 (200-3/4) | | | | | |
| LNAV/VNAV DA | 960-1 1/8 | | 391 (400-1 1/8) | | | | | |
| LNAV MDA | 960-1 | 391 (400-1) | 960-1 1/8 | 391 (400-1 1/8) | | | | |
| CIRCLING | 1100-1 | 531 (600-1) | 1440-2 1/2 | 871 (900-2 1/2) | 1680-3 | 1111 (1200-3) | | |

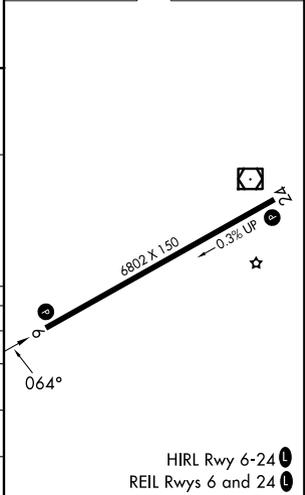

SE-4, 19 MAR 2026 to 16 APR 2026

SE-4, 19 MAR 2026 to 16 APR 2026