

WAAS CH <b>86620</b>	APP CRS <b>358°</b>	Rwy Idg TDZE Apt Elev	<b>5998</b> <b>202</b> <b>206</b>
-------------------------	------------------------	-----------------------------	---

# RNAV (GPS) RWY 36




PINEBLUFF RGNL/GRIDER FLD (PBF)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Stuttgart altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 42°C. When local altimeter setting not received, use Stuttgart altimeter setting and increase LPV DA to 527 feet. Increase LNAV/VNAV DA to 562 feet. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:  
Climb to 2000 direct  
WAGGG and hold.

ASOS <b>120.775</b>	LITTLE ROCK APP CON <b>119.85 353.6</b>	CLNC DEL <b>119.85</b>	UNICOM <b>123.0 (CTAF)</b>
------------------------	--	---------------------------	-------------------------------

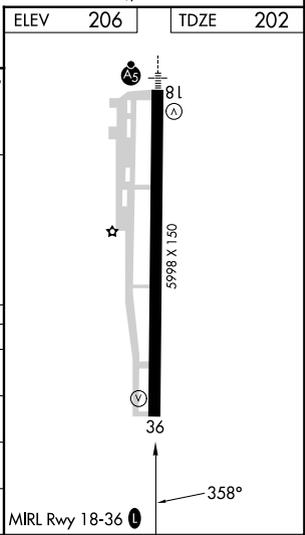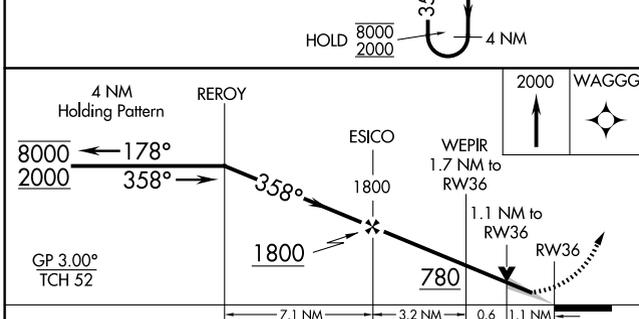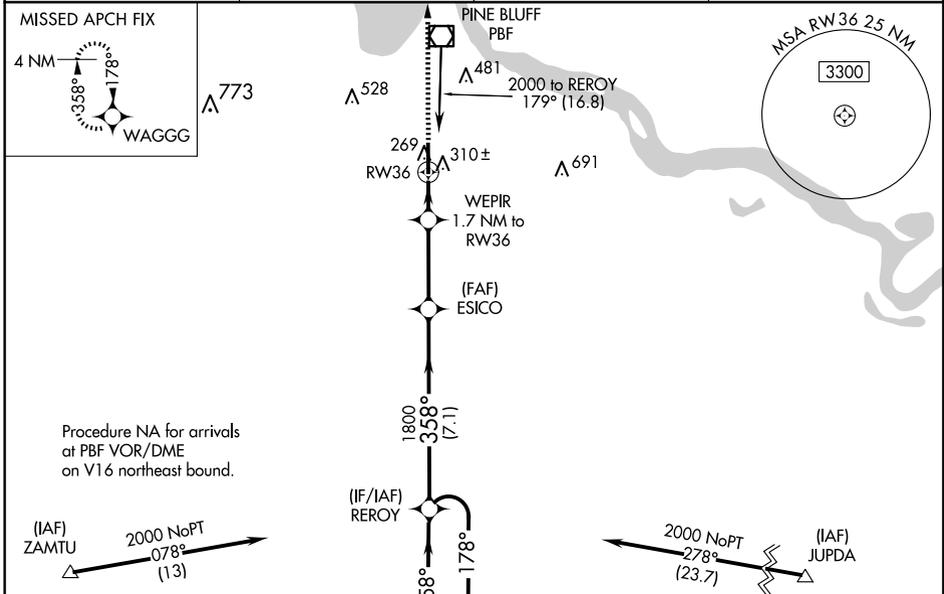

CATEGORY	A	B	C	D
LPV DA	452-1 250 (300-1)			
LNAV/VNAV DA	487-1 285 (300-1)			
LNAV MDA	600-1	398 (400-1)	600-1 <sup>1</sup> / <sub>8</sub>	398 (400-1 <sup>1</sup> / <sub>8</sub> )
CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	840-1 <sup>3</sup> / <sub>4</sub> 634 (700-1 <sup>3</sup> / <sub>4</sub> )	880-2 <sup>1</sup> / <sub>4</sub> 674 (700-2 <sup>1</sup> / <sub>4</sub> )

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026