

| | | |
|---------------------------|------------------------|------------------------|
| LOC I-MSS 108.7 | APP CRS 045° | Rwy Ldg 5601 |
| | | TDZE 205 |
| | | Apt Elev 221 |

ILS or LOC RWY 5



MASSENA INTL-RICHARDS FLD (MSS)

ADF required. ADF and RADAR required for procedure entry.

NA Circling Rwy 9, 23, 27 NA at night. When local altimeter setting not received, use PTD altimeter setting: increase S-ILS 5 DA to 528 feet and all visibilities ¼ SM; increase all MDAs 80 feet and S-LOC 5 visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH:
Climb to 1200 then climbing left turn to 2300 direct MISSE LOM and hold.

| | | |
|------------------------|--------------------------------------|---------------------------------|
| ASOS 128.075 | BOSTON CENTER 135.25 377.1 | UNICOM 123.0 (CTAF) 0 |
|------------------------|--------------------------------------|---------------------------------|

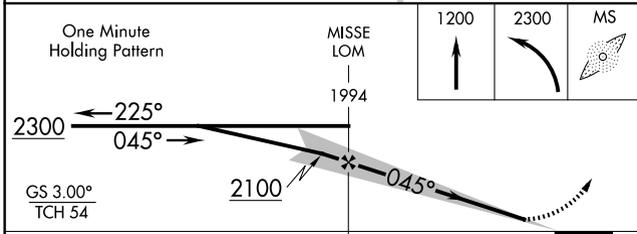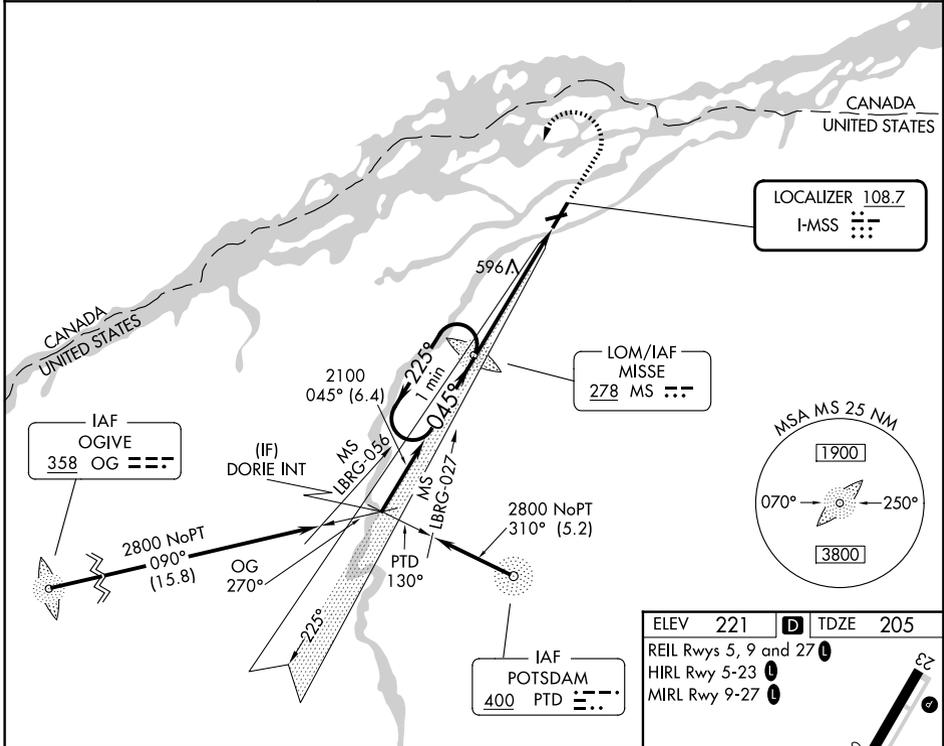

| | |
|-----------------------|----------|
| ELEV 221 | TDZE 205 |
| REIL Rwys 5, 9 and 27 | |
| HIRL Rwy 5-23 | |
| MIRL Rwy 9-27 | |

| | | | | | |
|-------------------|------|------|------|------|------|
| FAF to MAP 5.4 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:24 | 3:36 | 2:42 | 2:10 | 1:48 |

| CATEGORY | A | B | C | D |
|----------|-------|-------------|--------------|--------------|
| S-ILS 5 | | 455-¾ | 250 (300-¾) | |
| S-LOC 5 | 800-1 | 595 (600-1) | 800-1¾ | 595 (600-1¾) |
| CIRCLING | 800-1 | 579 (600-1) | 880-1¾ | 900-2¼ |
| | | | 659 (700-1¾) | 679 (700-2¼) |

NE-2, 19 MAR 2026 to 16 APR 2026

NE-2, 19 MAR 2026 to 16 APR 2026