

APP CRS	Rwy Ldg	<b>5839</b>
<b>275°</b>	TDZE	<b>28</b>
	Apt Elev	<b>55</b>


# RNAV (GPS) RWY 27L

ORLANDO SANFORD INTL (SF'B)

**⚠** Night Landing: Rwy 27C NA. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Orlando Exec altimeter setting: increase all MDAs 60 feet and visibility Cat C ¼ SM. VDP NA when using Orlando Exec altimeter setting.


MISSED APPROACH: Climb to 2000 direct JORVU and hold.

ATIS <b>125.975</b>	ORLANDO APP CON <b>135.3 351.9 (N)</b> <b>125.225 351.9 (S)</b>	SANFORD TOWER★ <b>120.3 (CTAF) 0 254.35</b>	GND CON <b>121.35 254.35</b>
------------------------	---	--	---------------------------------

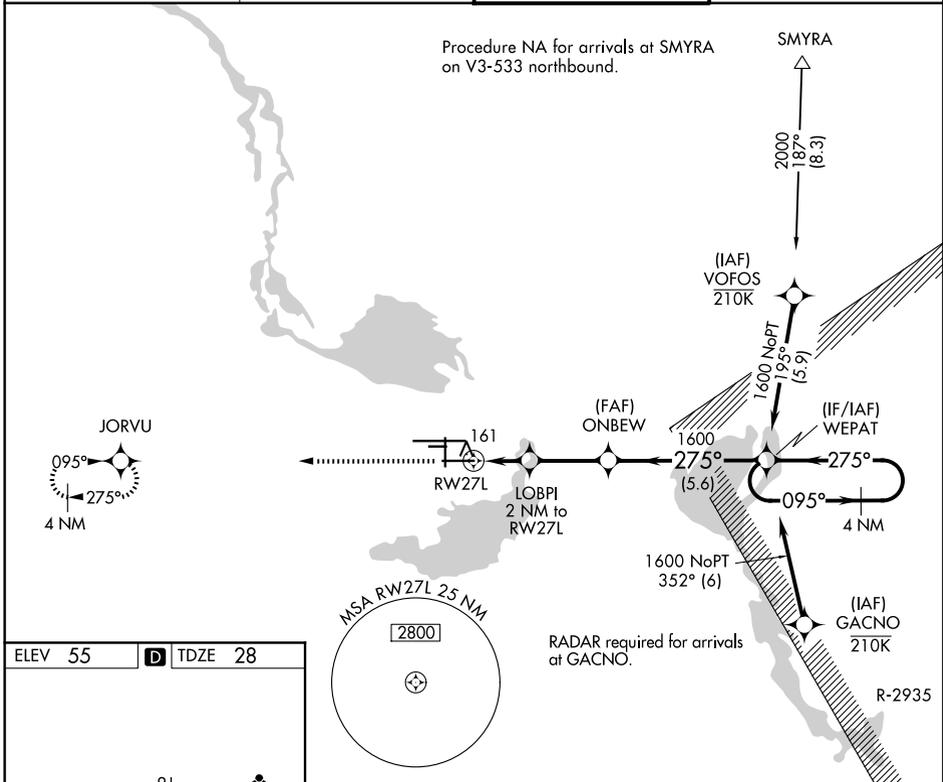

ELEV 55	<b>D</b>	TDZE 28
---------	----------	---------

MIRL Rwy 9C-27C and 18-36 **ⓘ**  
 HIRL Rwy 9L-27R and 9R-27L **ⓘ**  
 REIL Rws 9C, 18, 27L and 36

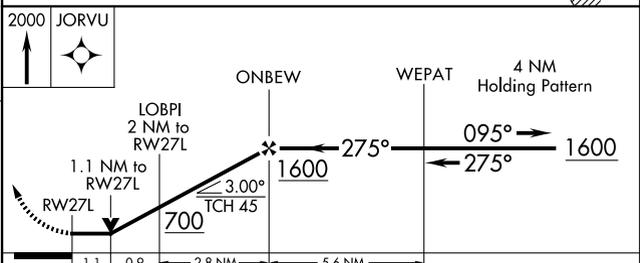

CATEGORY	A	B	C	D
LNAV MDA	420-1	392 (400-1)	420-1½ 392 (400-1½)	420-2 392 (400-2)
CIRCLING	580-1	525 (600-1)	600-1½ 545 (600-1½)	640-2 585 (600-2)

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026