




WAAS CH 63209 W27A	APP CRS 275°	Rwy Ldg 11002 TDZE 45 Apt Elev 55
--	------------------------	--

RNAV (GPS) RWY 27R

ORLANDO SANFORD INTL (SF'B)

<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, increase LNAV Cat C/D visibility to 1 SM.</p>	<p>MALSR</p>	<p>MISSED APPROACH: Climb to 2000 direct UGMAH and hold.</p>

<p>ATIS 125.975</p>	<p>ORLANDO APP CON 135.3 351.9 (N) 125.225 351.9 (S)</p>	<p>SANFORD TOWER ★ 120.3 (CTAF) 0 254.35</p>	<p>GND CON 121.35 254.35</p>
--------------------------------	--	---	---

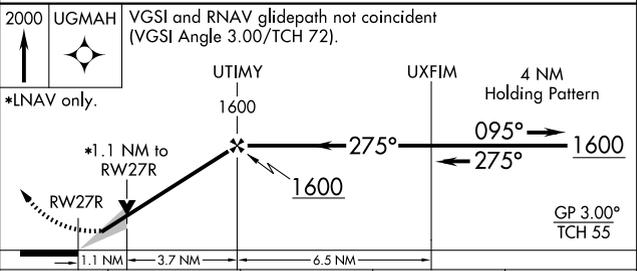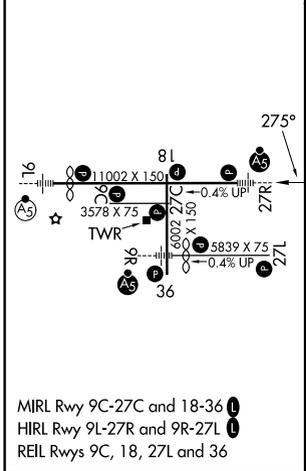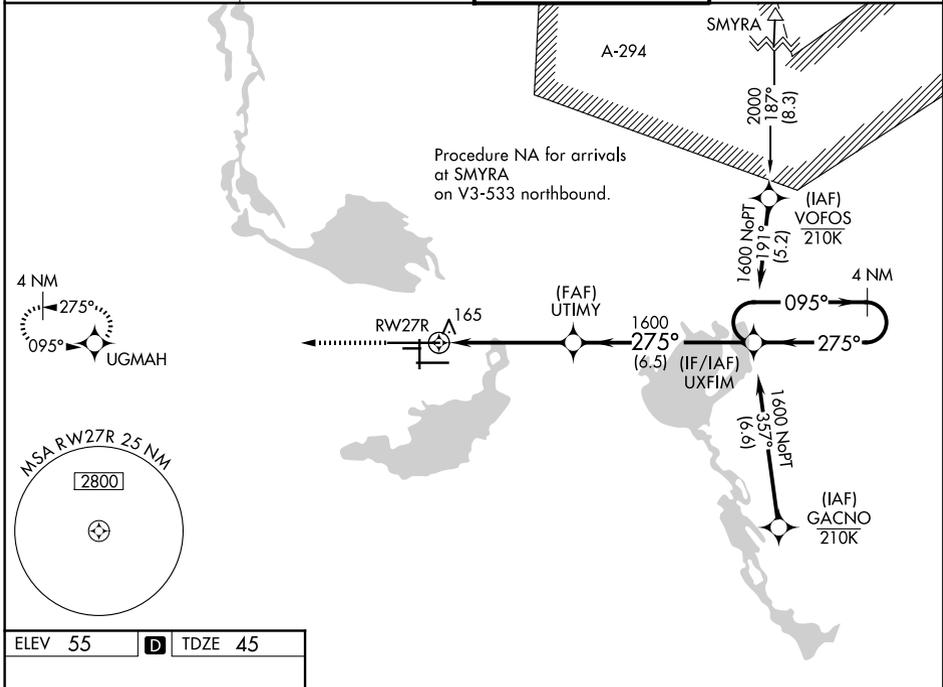

CATEGORY	A	B	C	D
LPV DA	245-½ 200 (200-½)			
LNAV/VNAV DA	425-⅞ 380 (400-⅞)			
LNAV MDA	420-½ 375 (400-½)	420-⅝ 375 (400-⅝)		
CIRCLING	580-1 525 (600-1)	600-1½ 545 (600-½)	640-2 585 (600-2)	

SE-3, 19 MAR 2026 to 16 APR 2026

SE-3, 19 MAR 2026 to 16 APR 2026