

WAAS CH <b>61015</b> <b>W06A</b>	APP CRS <b>063°</b>	Rwy Ldg TDZE Apt Elev	<b>6547</b> <b>1107</b> <b>1156</b>
--	------------------------	-----------------------------	---

# RNAV (GPS) RWY 6

FORT DODGE RGNL (FOD)

RNP APCH.

**⚠** Baro-VNAV NA when using Webster City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. VDP NA when using Webster City altimeter setting. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1349 feet; increase LNAV/VNAV DA to 1567 feet and all Cats visibility ¼ SM; increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ SM. For inoperative MALS when using Webster City altimeter setting, increase LPV all Cats visibility to 1 mile.

MALS




**MISSED APPROACH:**  
Climb to 3000 direct OXDAH and hold.

AWOS-3PT  
**118.775**

MINNEAPOLIS CENTER  
**134.0 288.3**



UNICOM  
**123.0 (CTAF)**

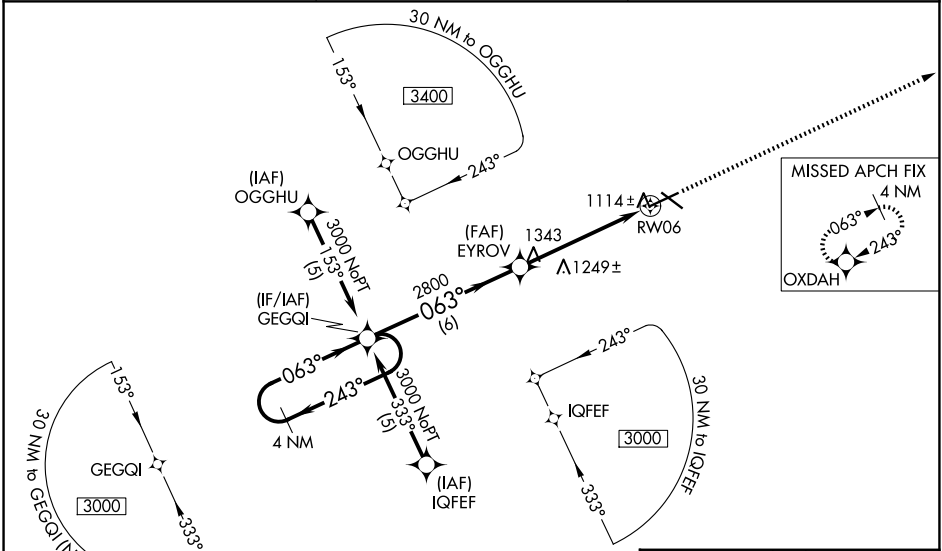

NC-3, 19 MAR 2026 to 16 APR 2026

NC-3, 19 MAR 2026 to 16 APR 2026

ELEV 1156 **D** TDZE 1107

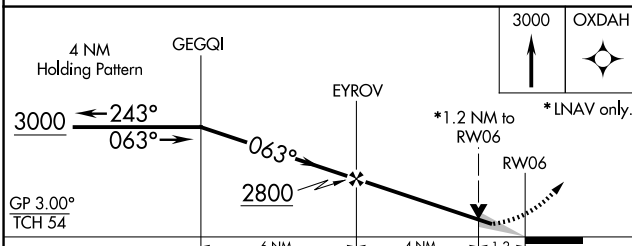

CATEGORY	A	B	C	D
LPV DA		1307-½	200 (200-½)	
LNAV/VNAV DA		1525-1	418 (400-1)	
LNAV MDA	1500-½	393 (400-½)		1500-1 393 (400-1)
CIRCLING	1560-1 404 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)

MIRL Rwy 12-30 **L**  
HIRL Rwy 6-24 **L**  
REIL Rwy 12, 24 and 30 **L**