

RNAV (RNP) Z RWY 19R


WICHITA DWIGHT D EISENHOWER NTL (ICT)

APP CRS	Rwy Ldg	10302
196°	TDZE	1330
	Apt Elev	1333


▼ For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F). For inoperative MALS, increase all Cats visibility to 1 ¼ mile. GPS required.

MALS R MISSED APPROACH: Climb to 4200 on track 196° to CUTIK and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

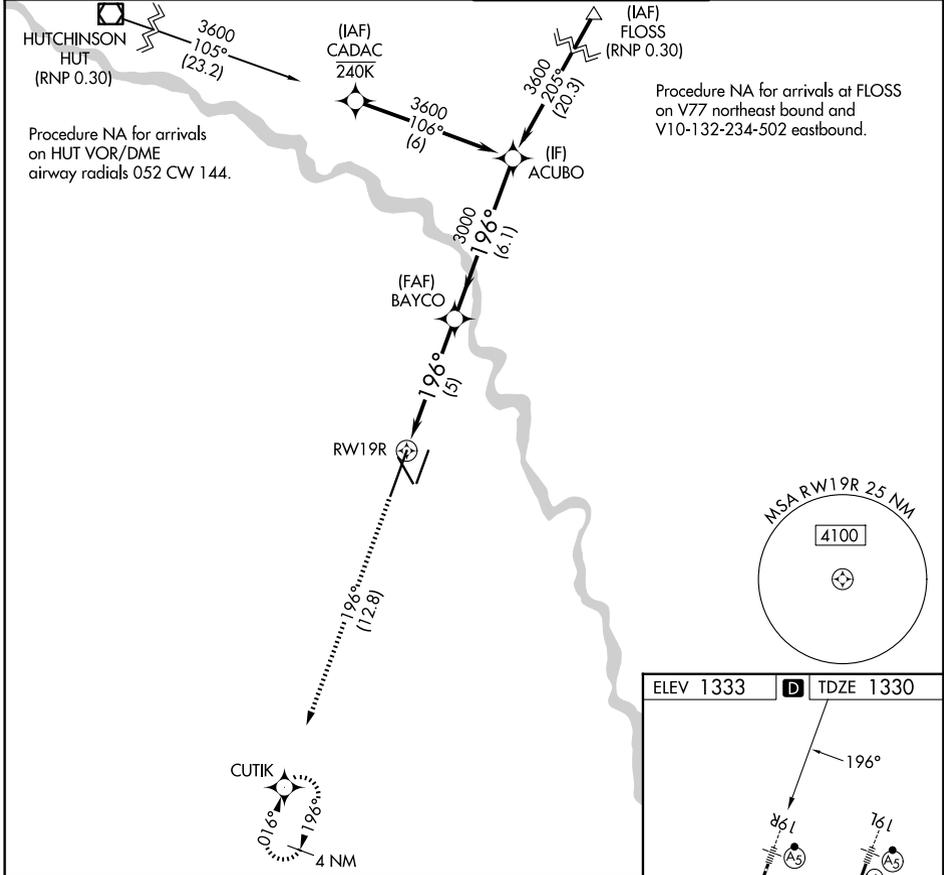

4200 ↑ tr 196°	CUTIK	BAYCO	ACUBO
		3000	3600
RWY19R		196°	
		3000	GP 3.00° TCH 52
	5 NM	6.1 NM	
CATEGORY	A	B	C
RNP 0.30 DA	1727/50 397 (400-1)		
AUTHORIZATION REQUIRED			

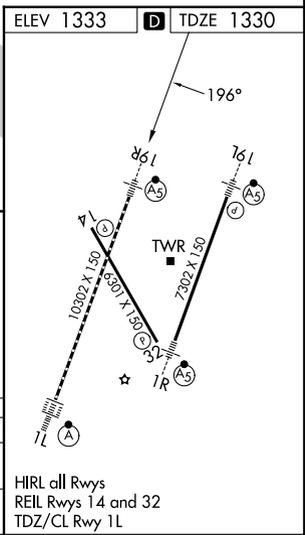

NC-2, 19 MAR 2026 to 16 APR 2026

NC-2, 19 MAR 2026 to 16 APR 2026