WAAS CH 49119 W19B	APP CRS 196°	Rwy Ldg 7302 TDZE 1320 Apt Elev 1333

RNAV (GPS) Y RWY 19L
WICHITA DWIGHT D EISENHOWER NTL (ICT)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Simultaneous approach authorized with ILS or LOC RWY 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 3600 direct YELOO and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON
125.15	126.7 353.5	118.2 257.8	121.9 348.6

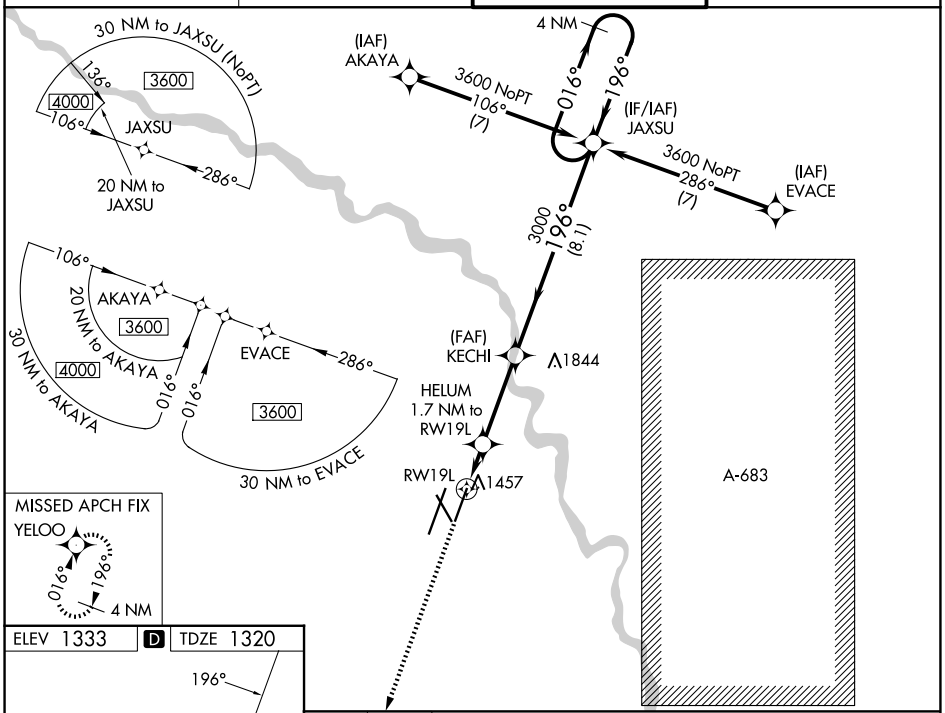

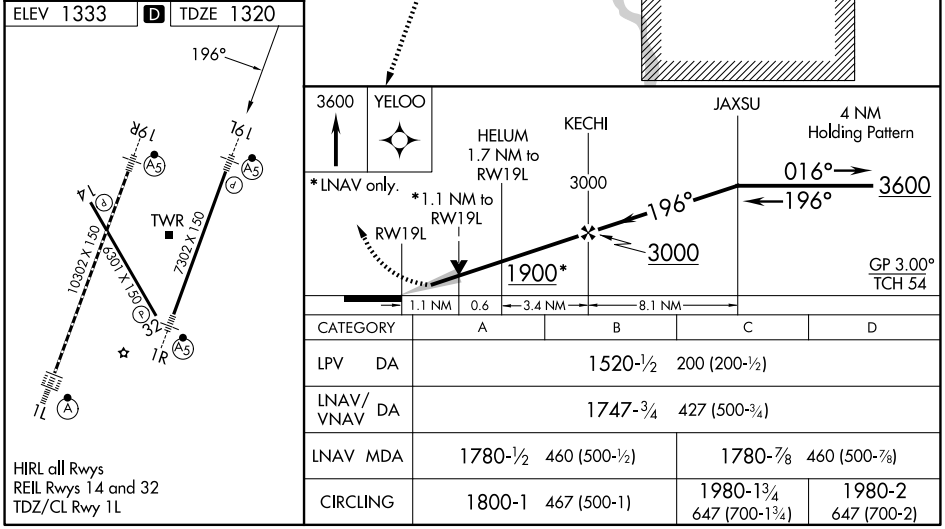

CATEGORY	A	B	C	D
LPV DA	1520-½ 200 (200-½)			
LNAV/VNAV DA	1747-¾ 427 (500-¾)			
LNAV MDA	1780-½ 460 (500-½)		1780-⅞ 460 (500-⅞)	
CIRCLING	1800-1 467 (500-1)		1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)

HIRL all Rwys
REIL Rwys 14 and 32
TDZ/CL Rwy 1L

NC-2, 19 MAR 2026 to 16 APR 2026

NC-2, 19 MAR 2026 to 16 APR 2026