


| | | |
|-------------|----------|--------------|
| APP CRS | Rwy Ldg | 10014 |
| 063° | TDZE | 258 |
| | Apt Elev | 305 |

RNAV (RNP) Z RWY 6R

GUAM INTL (GUM)(PGUM)


| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------|----------------------------------------------------------------------------------------------------------------------------------------|
| RNP AR APCH - GPS. | | MALSR | MISSED APPROACH: Climb to 3000 on 063° track to CIBOL and hold. *Missed approach requires minimum climb of 285 feet per NM to 1400. |
| <p>▼ For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. Rwy 6R helicopter visibility reduction below 3/4 SM NA. For inop ALS increase RNP 0.30 all Cats visibility to 1 1/8. Inop table does not apply to RNP 0.30*.</p> | | | |

| | | | |
|----------------------|----------------------------------|-----------------------------------|-------------------------------|
| ATIS 119.0 | GUAM CERAP 119.8 269.0 | AGANA TOWER 118.1 340.2 | GND CON 121.9 336.4 |
|----------------------|----------------------------------|-----------------------------------|-------------------------------|

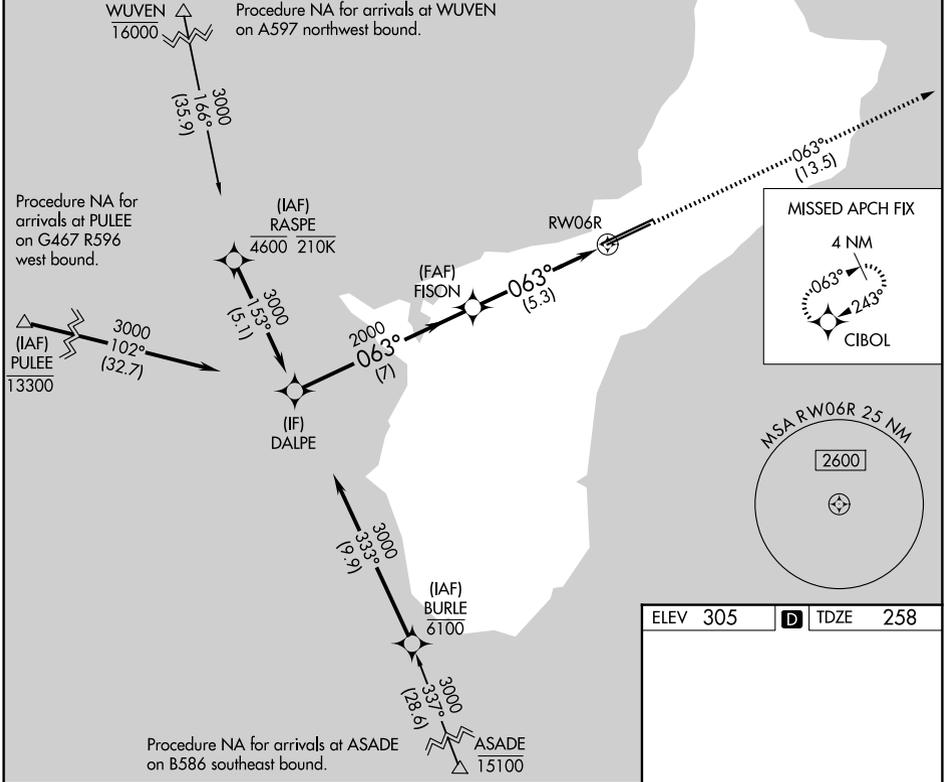

PAC, 19 MAR 2026 to 14 MAY 2026

PAC, 19 MAR 2026 to 14 MAY 2026

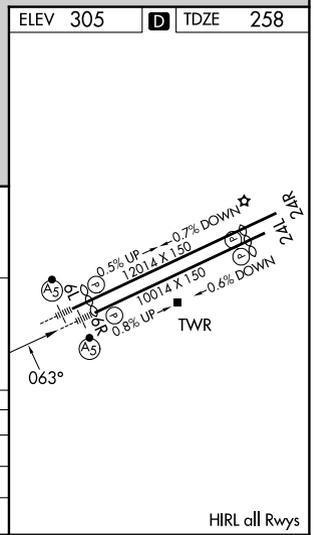

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).

| | | | | |
|--------------|---------|---|---------------|---|
| CATEGORY | A | B | C | D |
| RNP 0.30 DA* | 511-3/4 | | 253 (300-3/4) | |
| RNP 0.30 DA | 656-3/4 | | 398 (400-3/4) | |

AUTHORIZATION REQUIRED

HIRL all Rwys