


VOR/DME MIE 114.4 Chan 91	APP CRS 143°	Rwy Ldg 6500 TDZE 933 Apt Elev 937
---	------------------------	---

VOR RWY 14
DELAWARE COUNTY RGNL (MIE)

▽ VDP NA when using FWA altimeter setting. When local altimeter setting not received, use FWA altimeter setting and increase all MDAs 140 feet; increase S-14 Cat C visibility ½ SM, Cat D ¼ SM; increase Circling Cat C/D visibility ½ SM. BOHUW fix minimums: increase S-14 Cat C visibility ½ SM, Cat D ¼ SM and Circling Cat C/D visibility ½ SM.

▲ MISSED APPROACH: Climb to 2600 then left turn direct MIE VOR/DME and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

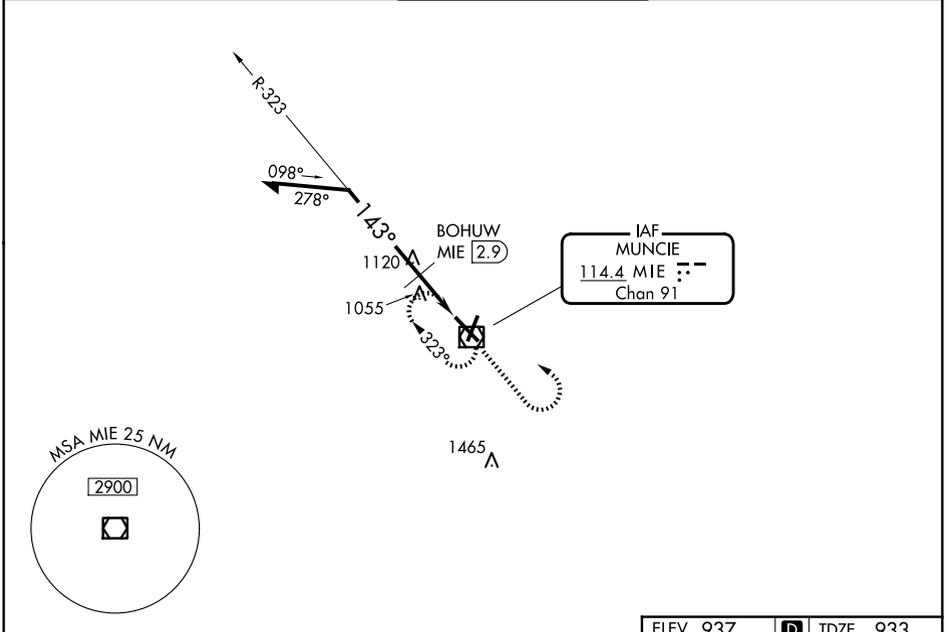

Remain within 10 NM 2500 BOHUW MIE 2.9 MIE 2.1 *1480 0.8 1.3 0.8		ELEV 937 D TDZE 933 2600 MIE *1620 when using FWA altimeter setting.	143° 21 6500 X 130 5128 X 100 TWR ★ 3 15 35	
CATEGORY	A	B	C	D
S-14	1480-1 547 (600-1)		1480-1½ 547 (600-1½)	1480-1¾ 547 (600-1¾)
CIRCLING	1480-1 543 (600-1)		1500-1½ 563 (600-1½)	1560-2 623 (700-2)
BOHUW FIX MINIMUMS				
S-14	1380-1 447 (500-1)		1380-1¼ 447 (500-1¼)	1380-1½ 447 (500-1½)
CIRCLING	1460-1 523 (600-1)		1500-1½ 563 (600-1½)	1560-2 623 (700-2)

HIRL Rwy 14-32 **0**
MIRL Rwy 3-21 **0**
REIL Rwys 3, 14 and 21 **0**