

WAAS CH <b>70628</b> <b>W06A</b>	APP CRS <b>057°</b>	Rwy Ldg <b>5184</b> TDZE <b>874</b> Apt Elev <b>876</b>
--	------------------------	---

# RNAV (GPS) RWY 6


CUYAHOGA COUNTY (CGF)

RNP APCH - GPS.

**⚠** Rwy 6 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using CLE altimeter setting. When local altimeter setting not received, use CLE altimeter setting and increase LPV DA to 1233 feet and all visibilities 1/2 SM. Increase LNAV/VNAV DA to 1433 feet and all visibilities 1/4 SM. Increase all MDAs 60 feet and LNAV visibility Cat C/D 1/2 SM, and Circling visibility Cat C/D 1/4 SM.

MISSED APPROACH: Climb to 3100 direct IFSEH and on track 130° to BRICC and hold.


D-ATIS <b>119.95</b>	CLEVELAND APP CON <b>125.35 346.325</b>	COUNTY TOWER★ <b>118.5 (CTAF)</b> <b>0</b>	GND CON <b>121.85</b>
-------------------------	--	---	--------------------------

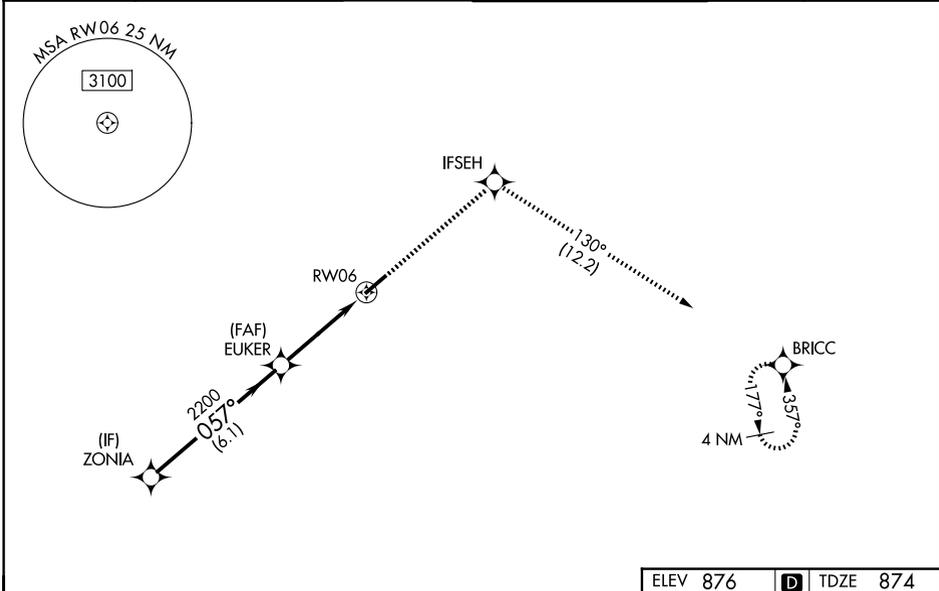


EC-2, 19 MAR 2026 to 16 APR 2026

EC-2, 19 MAR 2026 to 16 APR 2026

ELEV 876	<b>D</b>	TDZE 874
----------	----------	----------

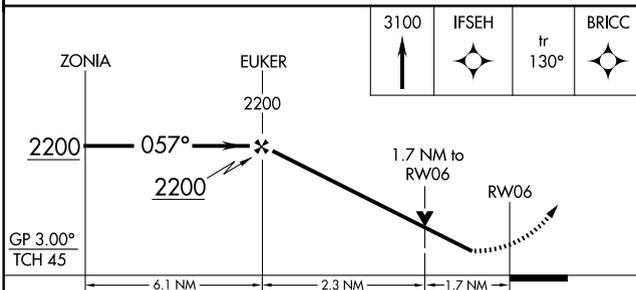

CATEGORY	A	B	C	D
LPV DA	1175-7/8		301 (300-7/8)	
LNAV/VNAV DA	1375-13/8		501 (500-13/8)	
LNAV MDA	1460-1	586 (600-1)	1460-13/4	586 (600-13/4)
CIRCLING	1460-1 584 (600-1)	1500-1 624 (700-1)	1560-2 684 (700-2)	1640-2 1/2 764 (800-2 1/2)

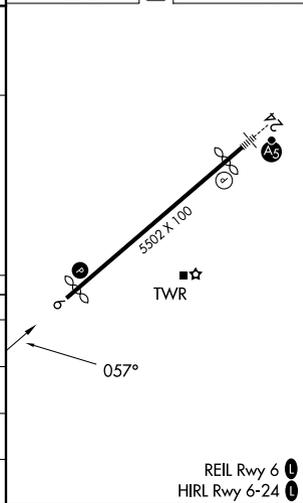

REIL Rwy 6 **0**  
HIRL Rwy 6-24 **0**