

RNAV (GPS) RWY 2

JACKSON RGNL (MKL)

WAAS CH 93511 W02A	APP CRS 023°	Rwy Ldg 6005 TDZE 433 Apt Elev 433
--	------------------------	---




RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.
▲ For inop ALS, increase visibility LNAV Cats A/B to 1 SM, and Cats C/D to 1 1/8 SM.


MALSRL 

MISSED APPROACH: Climb to 3000 direct GARTZ and hold.

ASOS 119.325	MEMPHIS CENTER 134.65 316.15	JACKSON TOWER ★ 127.15 (CTAF) 0 249.95	GND CON 120.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

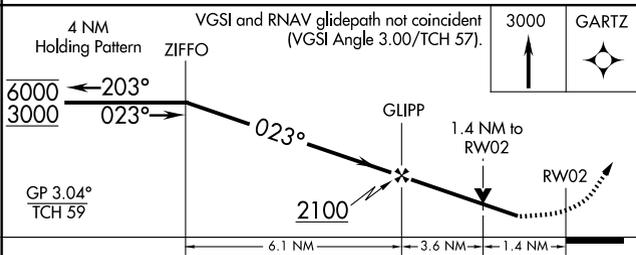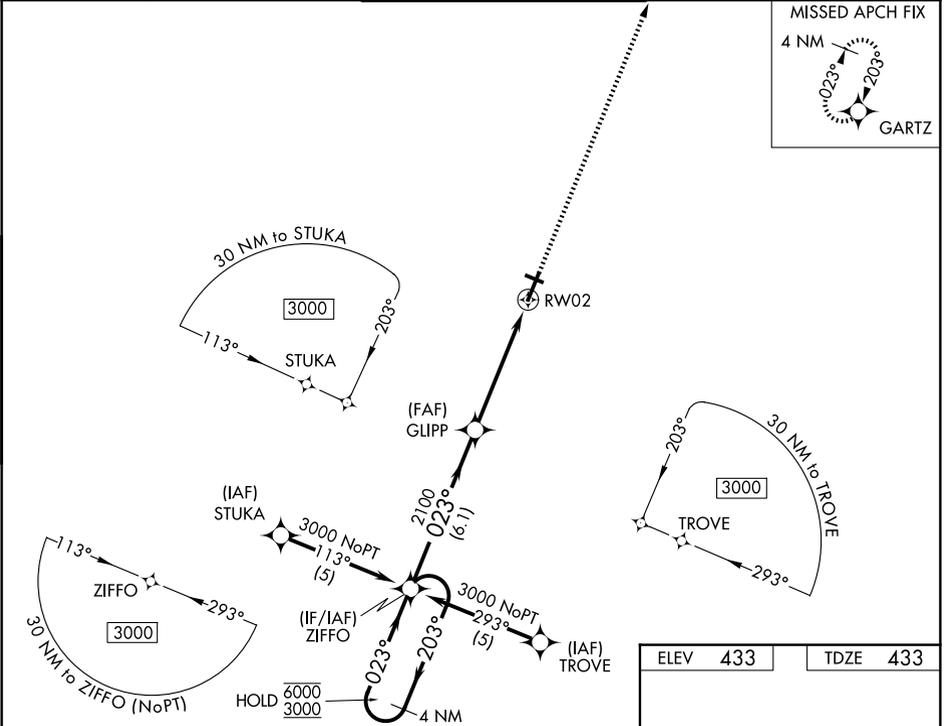

ELEV 433	TDZE 433
-----------------	-----------------

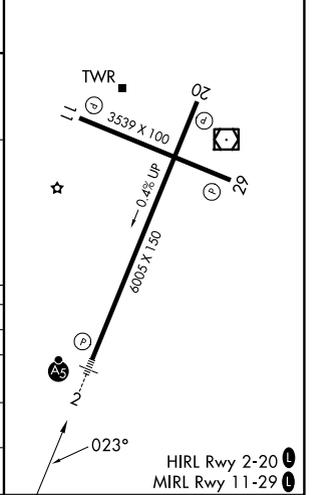

CATEGORY	A	B	C	D
LPV DA		772-3/4	339 (400-3/4)	
LNAV/VNAV DA		886-7/8	453 (500-7/8)	
LNAV MDA	900-3/4	467 (500-3/4)	900-1	467 (500-1)
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1 1/2 527 (600-1 1/2)	1080-2 647 (700-2)

SE-1, 19 MAR 2026 to 16 APR 2026

SE-1, 19 MAR 2026 to 16 APR 2026