

RNAV (GPS) RWY 14L

WAAS Chan 70209 W14A	APCH CRS 142°	Rwy Idg 13,502 TDZE 219 Arprt Elev 228
--	-------------------------	---


[USN]

LEMOORE NAS (REEVES FIELD) (KNLC)

RNP APCH - GPS

MISSED APPROACH: Climb to 1200, then climbing left turn to 2000 direct STRAT and hold.

ATIS★ 121.575 327.15	APP CON 124.1 269.025 (N) 118.15 269.025 (S)	TOWER★ 128.3 340.2	GND CON 121.65 305.2	ASR/ PAR
--------------------------------	--	------------------------------	--------------------------------	-------------

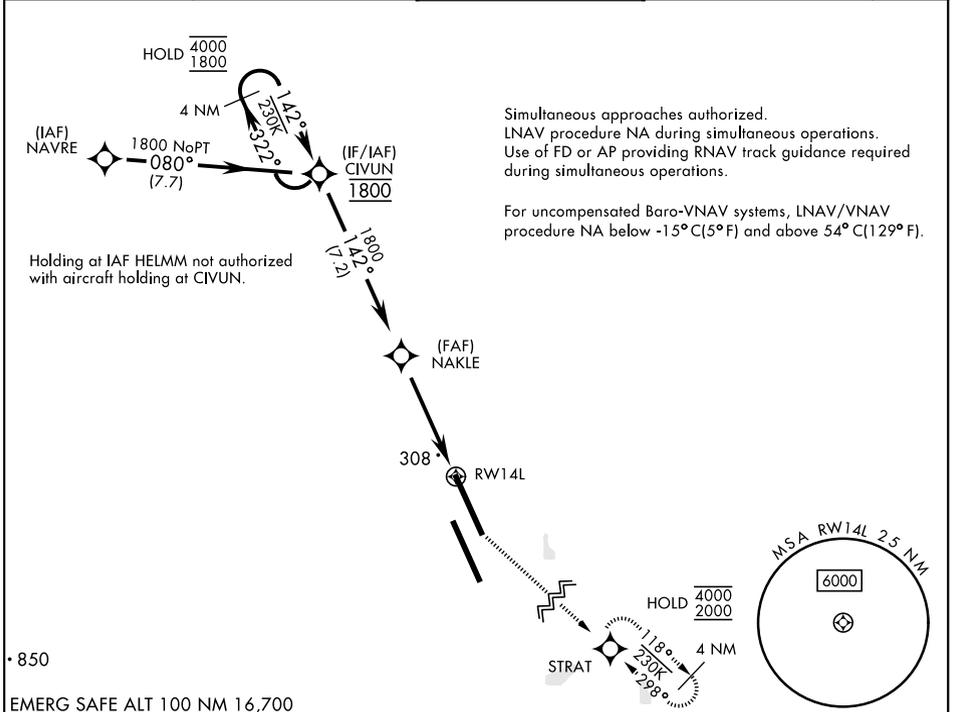


Simultaneous approaches authorized.
 LNAV procedure NA during simultaneous operations.
 Use of FD or AP providing RNAV track guidance required during simultaneous operations.

For uncompensated Baro-VNAV systems, LNAV/VNAV procedure NA below -15°C (5°F) and above 54°C (129°F).

SW-2, 19 MAR 2026 to 16 APR 2026

SW-2, 19 MAR 2026 to 16 APR 2026

EMERG SAFE ALT 100 NM 16,700
ELEV 228 TDZE 219

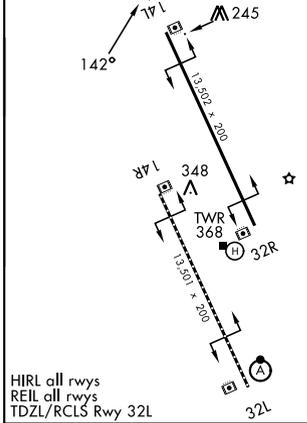

	4 NM Holding Pattern	CIVUN	NAKLE	1200	2000	STRAT
		4000 ← 322°	142° →	↑	↻	⊙
		1800	1800			
		GP 3.00°				
		TCH 54				
				1.3 NM to RWY 14L		
						4.8 NM
CATEGORY	A	B	C	D		
LPV DA	419-3/4	200	(200-3/4)			
LNAV/VNAV DA	582-1	363	(400-1)			
LNAV MDA	680-1	461 (500-1)	680-1 3/8	461 (500-1 3/8)		
CIRCLING	680-1	452 (500-1)	452 (500-1 1/2)	552 (600-2)	780-2	

RNAV (GPS) RWY 14L