


| | | | |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-ARR 108.9 | APP CRS 090° | Rwy Ldg TDZE Apt Elev | 6501 707 712 |
|---------------------------|------------------------|-----------------------------|---|

ILS or LOC RWY 9

AURORA MUNI (A.R.R.)


| | | | |
|--|--|--------|---|
| RADAR required for procedure entry. | | MALSRL | MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 on heading 090° and on DPA VOR/DME R-185 to VAINS INT/DPA 7.9 DME and hold, continue climb-in-hold to 3000. |
| For inop ALS, increase S-LOC 9 Cat C/D visibilities to 1 3/8 SM. | | | |

| | | | |
|-----------------------|---------------------------------------|---------------------------------------|-------------------------|
| ATIS 125.85 | CHICAGO APP CON 133.5 349.0 | AURORA TOWER ★ 120.6 (CTAF) | GND CON 121.7 |
|-----------------------|---------------------------------------|---------------------------------------|-------------------------|

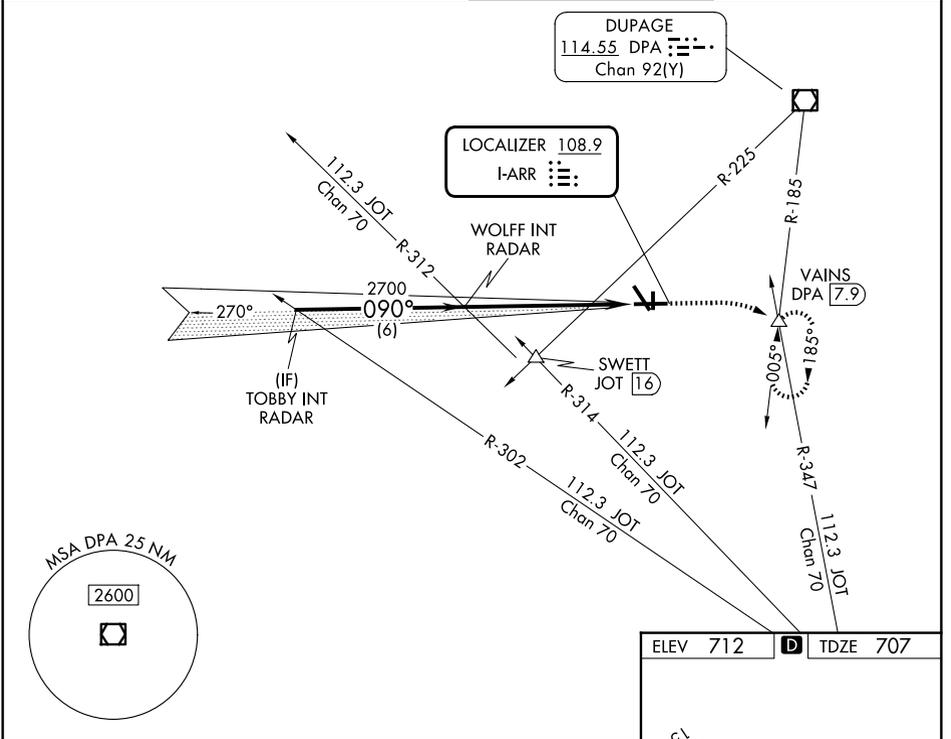

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026

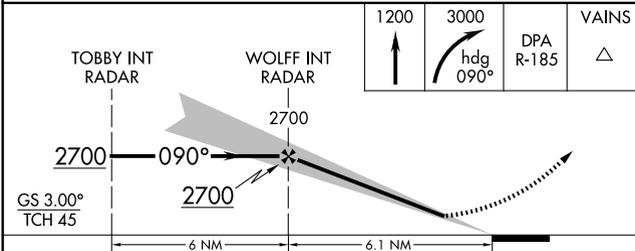

| | | |
|-----------------------------|------|---------------------|
| ELEV 712 | | TDZE 707 |
| | | |
| MIRL Rwy 18-36 | | |
| HIRL Rwy 15-33 and 9-27 | | |
| REIL Rwy 15, 18, 27, and 36 | | |
| FAF to MAP 6.1 NM | | |
| Knots | 60 | 90 120 150 180 |
| Min:Sec | 6:06 | 4:04 3:03 2:26 2:02 |

| | | | | |
|----------|------------------------|---|----------------------|---|
| CATEGORY | A | B | C | D |
| S-ILS 9 | 907-1/2 200 (200-1/2) | | | |
| S-LOC 9 | 1220-1/2 513 (600-1/2) | | 1220-1 513 (600-1) | |
| CIRCLING | 1220-1 508 (600-1) | | 1300-1/2 608 (700-2) | |