

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>90108</b><br><b>W17A</b> | APP CRS<br><b>174°</b> | Rwy Idg <b>7401</b><br>TDZE <b>1000</b><br>Apt Elev <b>1000</b> |
|--|------------------------|---|

# RNAV (GPS) RWY 17




STILLWATER RGNL (SWO)

RNP APCH - GPS.


**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Ponca City altimeter setting. For inop ALS when using Ponca City altimeter setting, increase LPV visibility to 7/8 SM, LNAV/VNAV visibility to 1 SM, and LNAV Cats C and D visibility to 1 3/8 SM. When local altimeter setting not received, use Ponca City altimeter setting; increase LPV DA to 1280 feet; increase LNAV/VNAV DA to 1359 feet and all visibilities 1/8 SM; increase all MDA 80 feet and visibility LNAV Cats C and D 1/4 SM and Circling Cat D 1/2 SM. For inop ALS, increase LNAV/VNAV visibility to 7/8 SM.

**MALSR** MISSED APPROACH: Climb to 3000 direct ESCOM and hold.

|                        |  |  |                         |                         |
|------------------------|--|--|-------------------------|-------------------------|
| ASOS<br><b>135.725</b> | KANSAS CITY CENTER<br><b>127.8 319.1</b> | STILLWATER TOWER ★<br><b>125.35 (CTAF) 0</b> | GND CON<br><b>121.6</b> | UNICOM<br><b>122.95</b> |
|------------------------|--|--|-------------------------|-------------------------|

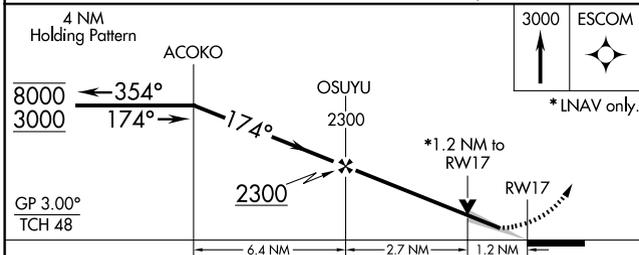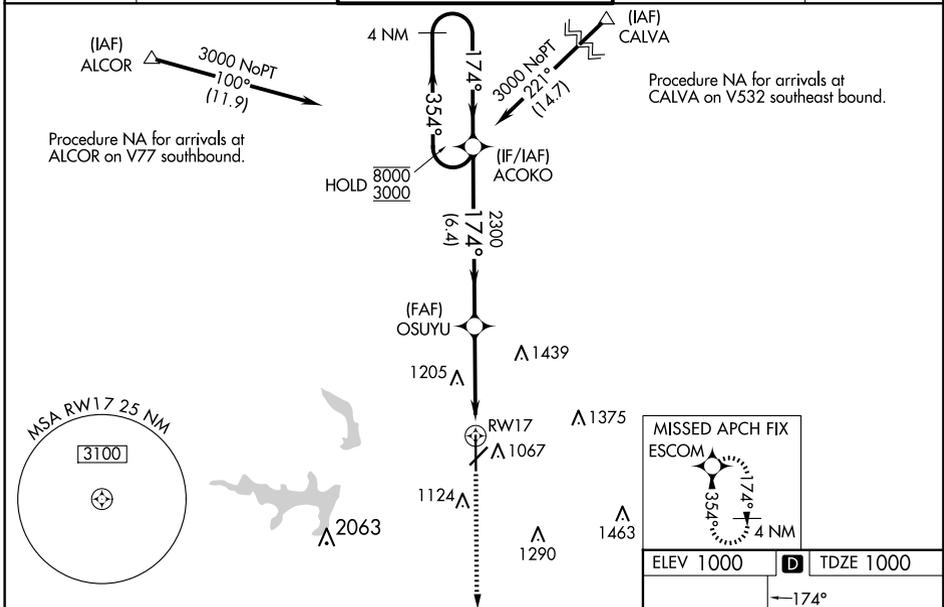

| CATEGORY     | A                     | B                     | C                             | D                             |
|--------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
| LPV DA       |                       | 1200-1/2              | 200 (200-1/2)                 |                               |
| LNAV/VNAV DA |                       | 1279-1/2              | 279 (300-1/2)                 |                               |
| LNAV MDA     | 1440-1/2              | 440 (500-1/2)         | 1440-3/4                      | 440 (500-3/4)                 |
| CIRCLING     | 1440-1<br>440 (500-1) | 1460-1<br>460 (500-1) | 1520-1 1/2<br>520 (600-1 1/2) | 1740-2 1/4<br>740 (800-2 1/4) |

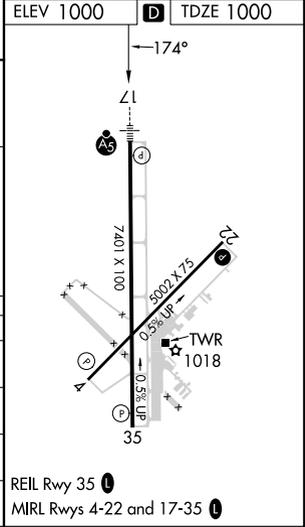

SC-1, 19 MAR 2026 to 16 APR 2026

SC-1, 19 MAR 2026 to 16 APR 2026