

| | | |
|--|------------------------|--|
| WAAS CH 56537 W06A | APP CRS 063° | Rwy Ldg TDZE 722 Apt Elev 722 |
|--|------------------------|--|



RNAV (GPS) RWY 6

COLES COUNTY MEML (MTO)


⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Champaign/Urbana altimeter setting and increase all DA 82 feet, increase MDA 100 feet, increase LPV, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Champaign/Urbana altimeter setting. Rwy 6 helicopter visibility reduction below ¼ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Circling NA to Rws 18 and 36.

MISSED APPROACH:
Climb to 3000 direct NIBIE and hold.

| | | |
|------------------------|--|---------------------------------|
| ASOS 118.475 | CHAMPAIGN APP CON ★ 132.85 290.225 | UNICOM 122.7 (CTAF) 0 |
|------------------------|--|---------------------------------|

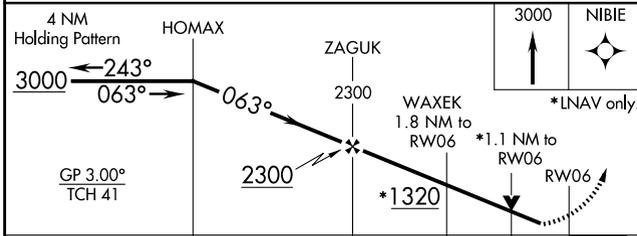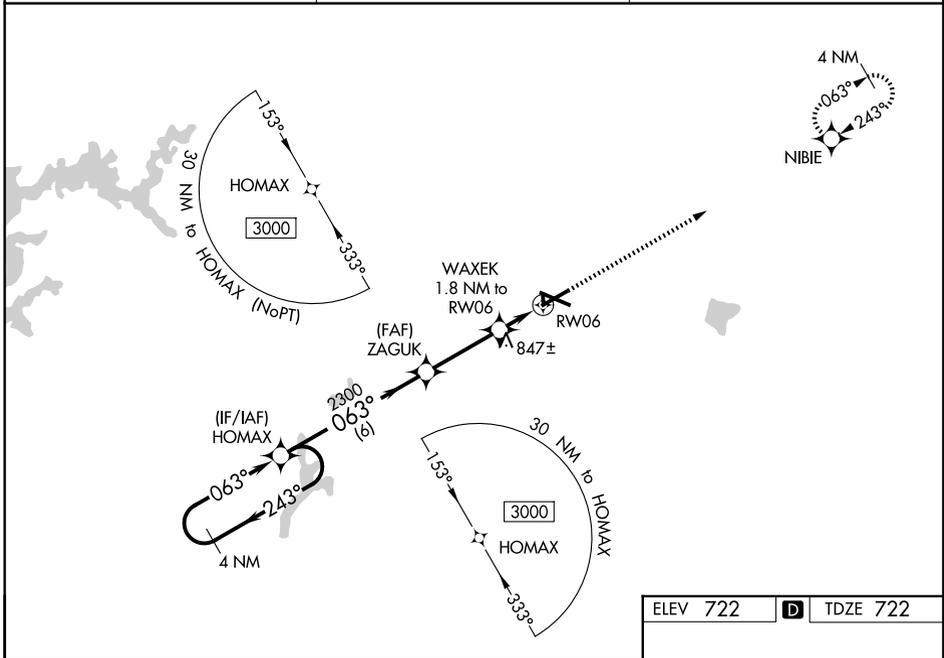

| | | |
|----------|----------|----------|
| ELEV 722 | D | TDZE 722 |
|----------|----------|----------|



| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------------|-----------------------|
| LPV DA | | 972-7/8 | 250 (300-7/8) | |
| LNAV/VNAV DA | | 1124-13/8 | 402 (500-13/8) | |
| LNAV MDA | 1100-1 | 378 (400-1) | 1100-1 1/8 | 378 (400-1 1/8) |
| CIRCLING | 1160-1 438 (500-1) | 1180-1 458 (500-1) | 1240-1 1/2 518 (600-1 1/2) | 1380-2 658 (700-2) |

MIRL Rwy 6-24 **0**
HIRL Rwy 11-29 **0**
REIL Rws 6, 11, and 24 **0**

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026