


WAAS CH <b>82502</b> <b>W23A</b>	APP CRS <b>231°</b>	Rwy Ldg TDZE <b>1224</b> Apt Elev <b>1232</b>
--	------------------------	---

# RNAV (GPS) RWY 23

BRainerd LAKES RGNL (B.R.D)

RNP APCH - GPS.		MALSR 	MISSED APPROACH: Climb to 1800 then climbing right turn to 3300 direct CUCAC and hold.
<p><b>⚠</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using AIT altimeter setting. When local altimeter setting not received, use AIT altimeter setting and increase LPV DA to 1476 feet; increase LNAV/VNAV DA to 1553 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D 1/2 SM, and Circling visibility Cat C/D 1/2 SM. For inop ALS when using AIT altimeter setting, increase LNAV/VNAV Cats C/D visibility to 1 1/2 SM. For inop ALS, increase LNAV/VNAV all Cats visibility 7/8 SM.</p>			

ASOS <b>126.775</b>	MINNEAPOLIS CENTER <b>118.05 239.0</b>	UNICOM <b>122.7(CTAF) 0</b>
------------------------	---	--------------------------------

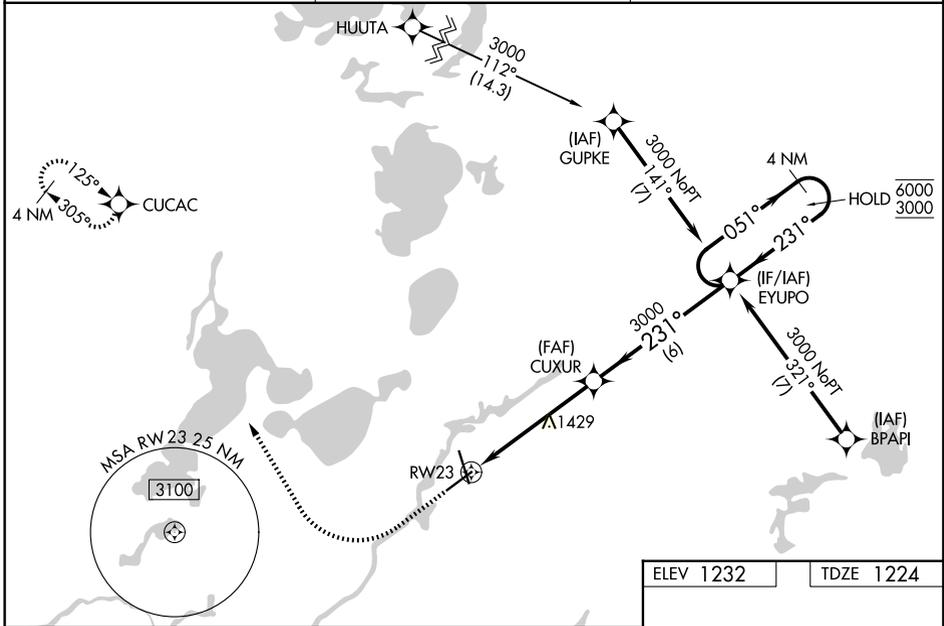

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026

		CUCAC		
<p>1.3 NM to RW23</p>		<p>4 NM Holding Pattern</p>		
<p>1.3 NM</p>		<p>6 NM</p>		
CATEGORY	A	B	C	D
LPV DA		1424-1/2	200 (200-1/2)	
LNAV/VNAV DA		1501-1/2	277 (300-1/2)	
LNAV MDA	1680-1/2	456 (500-1/2)	1680-7/8	456 (500-7/8)
CIRCLING	1700-1	468 (500-1)	1780-1 1/2	1860-2
			548 (600-1 1/2)	628 (700-2)

