

| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 78104 W27A | APP CRS 264° | Rwy Ldg TDZE Apt Elev | 6701 843 845 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 27R


GRAND FORKS INTL (GFK)

RNP APCH - GPS.


⚠ Baro-VNAV and VDP NA when using KKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use KKN altimeter setting and increase LPV DA to 1104 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 1178 feet and all visibilities ½ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct DUCEV and hold, continue climb-in-hold to 4000.



| | | | | |
|----------------------|---|---|---------------------------|-------------------------|
| ATIS 119.4 | GRAND FORKS APP CON ★ 118.1 318.1 | GRAND FORKS TOWER ★ 118.4 (CTAF) 350.35 | GND CON 124.575 | UNICOM 122.95 |
|----------------------|---|---|---------------------------|-------------------------|



Procedure NA for arrival on GFK VOR/DME airway radials 360 CW 160.

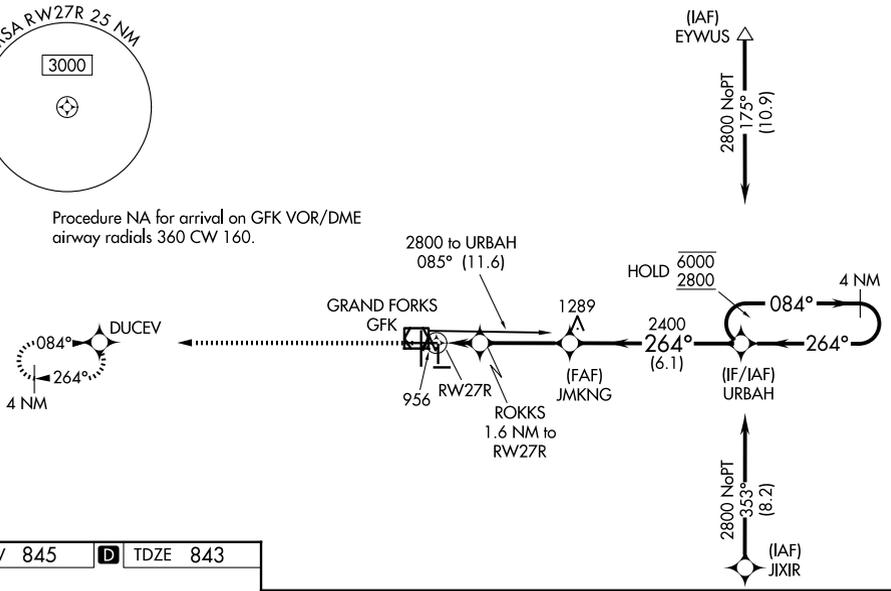

| | | |
|----------|----------|----------|
| ELEV 845 | D | TDZE 843 |
|----------|----------|----------|

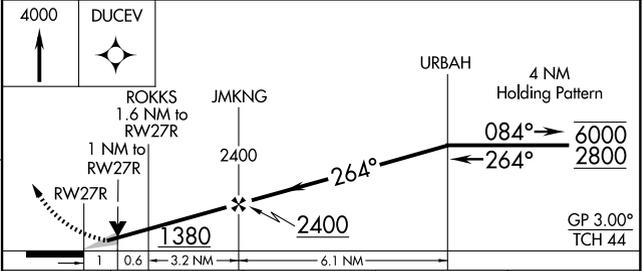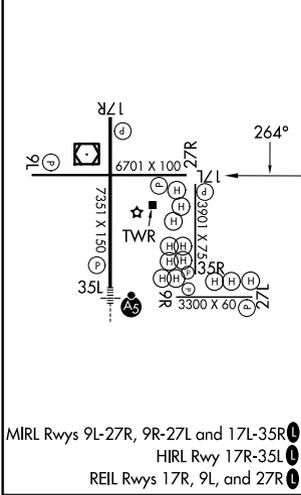

| CATEGORY | A | B | C | D |
|--------------|-----------------------|-----------------------|-------------------------|-----------------------|
| LPV DA | | 1043-¾ | 200 (200-¾) | |
| LNAV/VNAV DA | | 1117-7/8 | 274 (300-7/8) | |
| LNAV MDA | | 1220-1 | 377 (400-1) | |
| CIRCLING | 1260-1 415 (500-1) | 1300-1 455 (500-1) | 1400-1½ 555 (600-1½) | 1420-2 575 (600-2) |

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026