

WAAS CH <b>63119</b> <b>W06A</b>	APP CRS <b>063°</b>	Rwy Ldg TDZE Apt Elev	<b>5013</b> <b>394</b> <b>398</b>
--	------------------------	-----------------------------	---


# RNAV (GPS) RWY 6

HARRISBURG-RALEIGH (HSB)


Baro-VNAV NA when using Williamson County Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Marion altimeter setting: increase LPV DA to 744 feet; increase LNAV/VNAV DA to 1020 feet; increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM. VDP NA with Williamson County Rgnl altimeter setting.

MISSED APPROACH:  
Climb to 2000 direct JIVSO and hold.

AWOS-3PT <b>135.925</b>	KANSAS CITY CENTER <b>127.475 346.275</b>	UNICOM <b>122.8 (CTAF) 0</b>
----------------------------	--	---------------------------------

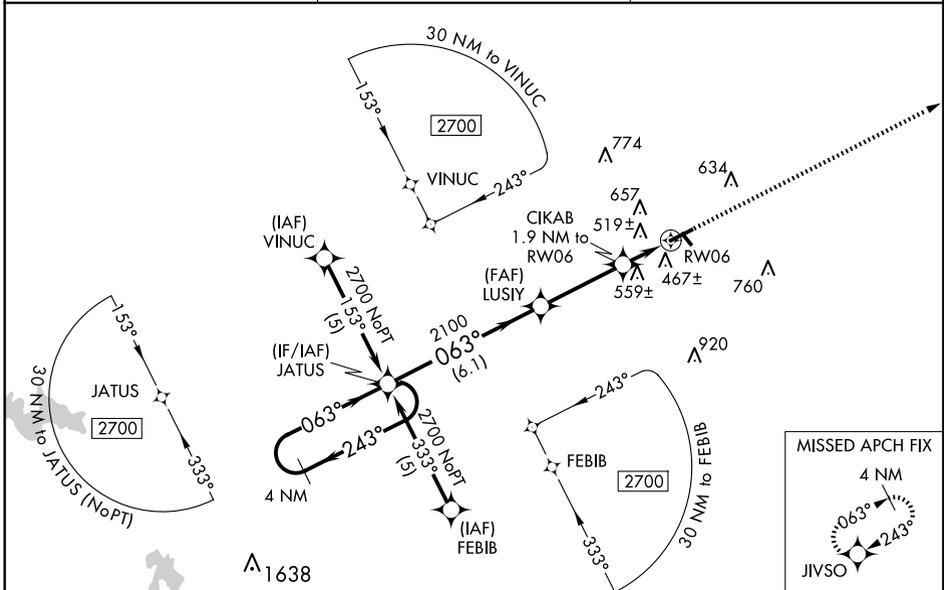

4 NM Holding Pattern JATUS		2000 JIVSO		
2700 ← 243° / 063° →		*LNAV only		
GP 3.00° TCH 35°		*1.3 NM to RW06		
6.1 NM		0.6 NM		
3.3 NM		1.3 NM		
2100		1020		
CATEGORY	A	B	C	D
LPV DA	682-1		288 (300-1)	
LNAV/VNAV DA	958-2		564 (600-2)	
LNAV MDA	820-1		820-1¼ 426 (500-1¼)	
CIRCLING	900-1 502 (600-1)	1020-1 622 (700-1)	1020-1¾ 622 (700-1¾)	1080-2¼ 682 (700-2¼)

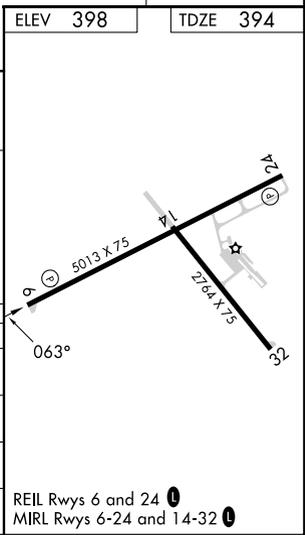

EC-3, 19 MAR 2026 to 16 APR 2026

EC-3, 19 MAR 2026 to 16 APR 2026