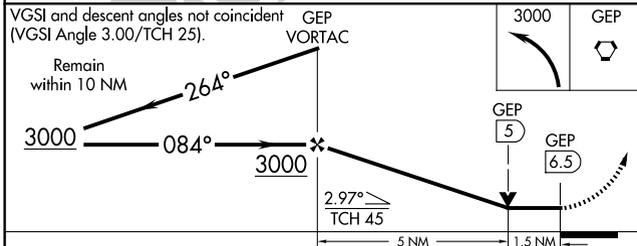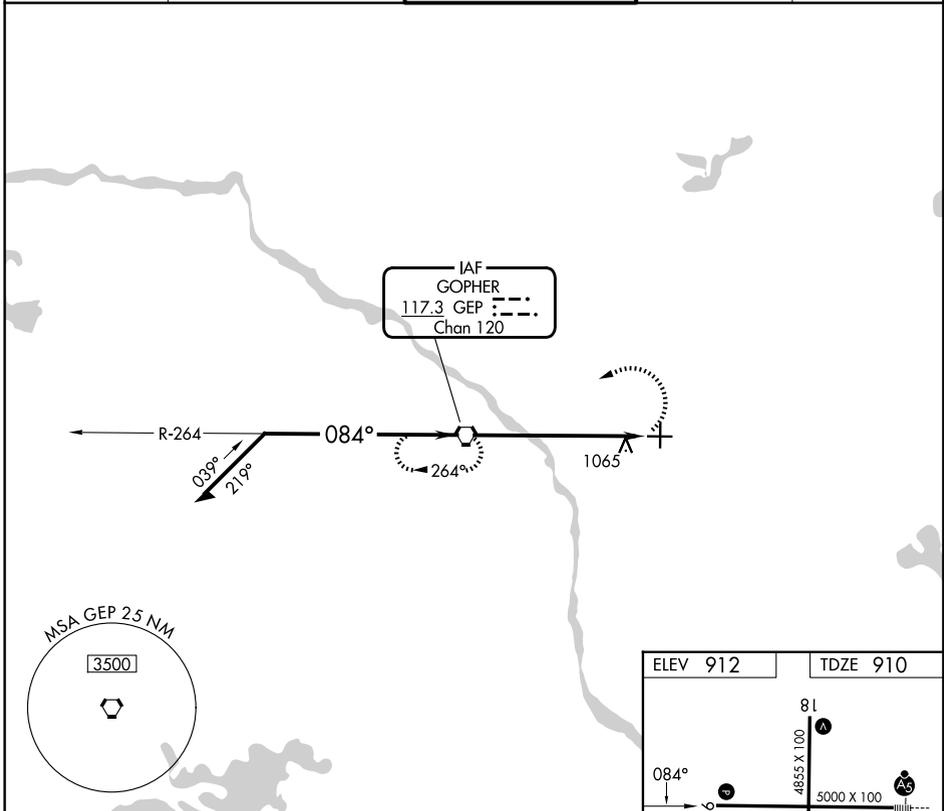| VORTAC GEP	APP CRS	Rwy Ldg	5000
117.3	**084°**	TDZE	910
Chan **120**		Apt Elev	912

VOR RWY 9
ANOKA COUNTY/BLAINE (JANES FLD) (ANE)

▼ When local altimeter setting not received, use Crystal altimeter setting: increase all MDA 40 feet and increase S-9 visibility Cat C/D ⅛ SM and Circling Cat D ¼ SM. VDP NA when using Crystal altimeter setting.

MISSED APPROACH: Climbing left turn to 3000 direct GEP VORTAC and hold.

ATIS	MINNEAPOLIS APP CON	ANOKA TOWER★	GND CON	UNICOM
120.625	**126.5 335.65**	**132.4** (CTAF) Ⓛ	**121.85**	**122.95**

IAF
GOPHER
117.3 GEP ⋯ ⋯⋯
Chan 120

R-264

084°

039° 219° 264°

1065

MSA GEP 25 NM

3500

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).

ELEV	912	TDZE	910

4855 X 100
5000 X 100
084°
TWR
18 / 36
27 / 9
A6
A

GEP VORTAC
264°
Remain within 10 NM
3000
084°
3000
2.97°
TCH 45
5 NM
1.5 NM

3000 GEP
GEP [5]
GEP [6.5]

HIRL Rwy 9-27 Ⓛ
MIRL Rwy 18-36 Ⓛ
REIL Rwys 9, 18 and 36 Ⓛ

FAF to MAP 6.5 NM

CATEGORY	A	B	C	D
S-9	1400-1	490 (500-1)	1400-1⅜	490 (500-1⅜)
CIRCLING	1400-1	488 (500-1)	1460-1½ 548 (600-1½)	1580-2 668 (700-2)

Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10