

|  |                        |   |
|--|------------------------|---|
| WAAS<br>CH <b>72621</b><br><b>W28A</b> | APP CRS<br><b>281°</b> | Rwy Idg<br>TDZE <b>1253</b><br>Apt Elev <b>1253</b> |
|--|------------------------|---|

# RNAV (GPS) RWY 28


BEAVER COUNTY (BVI)

RNP APCH.



Baro-VNAV and VDP NA when using Pittsburgh Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 26°C (78°F). When local altimeter setting not received, use Pittsburgh Intl altimeter setting; increase all DA 50 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ¼ SM. Circling Rwy 28 NA at night. Rwy 28 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct WOBUX and hold.

|                       |   |  |                         |  |
|-----------------------|---|--|-------------------------|--|
| ATIS<br><b>118.35</b> | PITTSBURGH APP CON<br><b>124.75 338.2</b> | BEAVER COUNTY TOWER *<br><b>120.3 (CTAF) 0</b> | GND CON<br><b>121.8</b> | CLNC DEL<br><b>124.85</b><br>(when twr closed) |
|-----------------------|---|--|-------------------------|--|

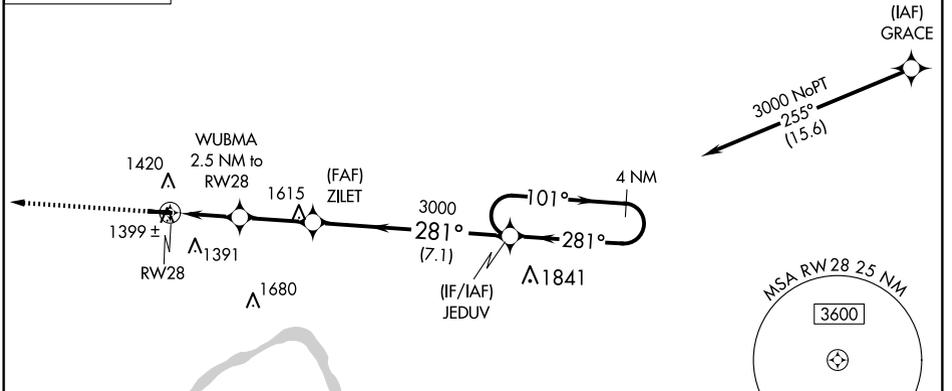

|           |           |
|-----------|-----------|
| ELEV 1253 | TDZE 1253 |
|-----------|-----------|

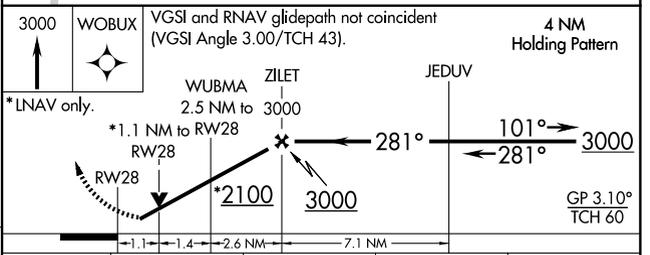

| CATEGORY      | A      | B           | C           | D                                  |
|---------------|--------|-------------|-------------|------------------------------------|
| LPV DA        |        | 1512-1      | 259 (300-1) |                                    |
| LNAV/ VNAV DA |        | 1580-1      | 327 (400-1) |                                    |
| LNAV MDA      | 1660-1 | 407 (500-1) | 1660-1½     | 407 (500-1½)                       |
| CIRCLING      | 1720-1 | 467 (500-1) | 1720-1½     | 1820-2<br>467 (500-1½) 567 (600-2) |

NE-4, 19 MAR 2026 to 16 APR 2026

NE-4, 19 MAR 2026 to 16 APR 2026