

NE-3, 19 MAR 2026 to 16 APR 2026

**TOP ALTITUDE:**  
**3000**



TAKEOFF MINIMUMS

Rwy 14: Standard.  
Rwy 32: Standard with minimum climb  
of 240' per NM to 1900.

NOTE: RNAV 1.  
NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: Turbo-jets only.  
NOTE: Takeoff Rwy 32 requires a climb to 2500 on  
heading 34.1° before proceeding on the ATC  
assigned heading for obstacle avoidance.


NOTE: Chart not to scale.

**DEPARTURE ROUTE DESCRIPTION**

Climb on heading assigned by ATC, expect RADAR vectors to POOCH, then on track 240° to SCRAM, thence . . . .

. . . . as depicted. Maintain 3000, expect clearance to filed altitude within ten (10) minutes after departure.

GLANC TRANSITION (SCRAM6.GLANC):

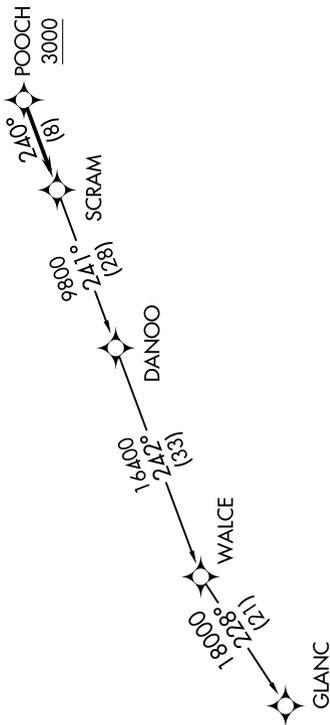

NE-3, 19 MAR 2026 to 16 APR 2026