WAAS CH 56505 W01A	APP CRS 004°	Rwy Ldg 6501 TDZE 760 Apt Elev 772

RNAV (GPS) RWY 1
FREMONT MUNI (FFX)

Baro-VNAV NA when using Muskegon altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). Rwy 1 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Muskegon altimeter setting and increase all DA 65 feet, and all visibilities ¼ mile. Increase all MDA 80 feet, and Cat C/D visibilities ¼ mile. VDP NA when using Muskegon altimeter setting.

MISSED APPROACH: Climb to 2900 direct OJANA and hold.

AWOS-3P	GREAT LAKES APP CON ★	CLNC DEL	UNICOM
118.775	119.8 290.35	118.25	123.0 (CTAF) L

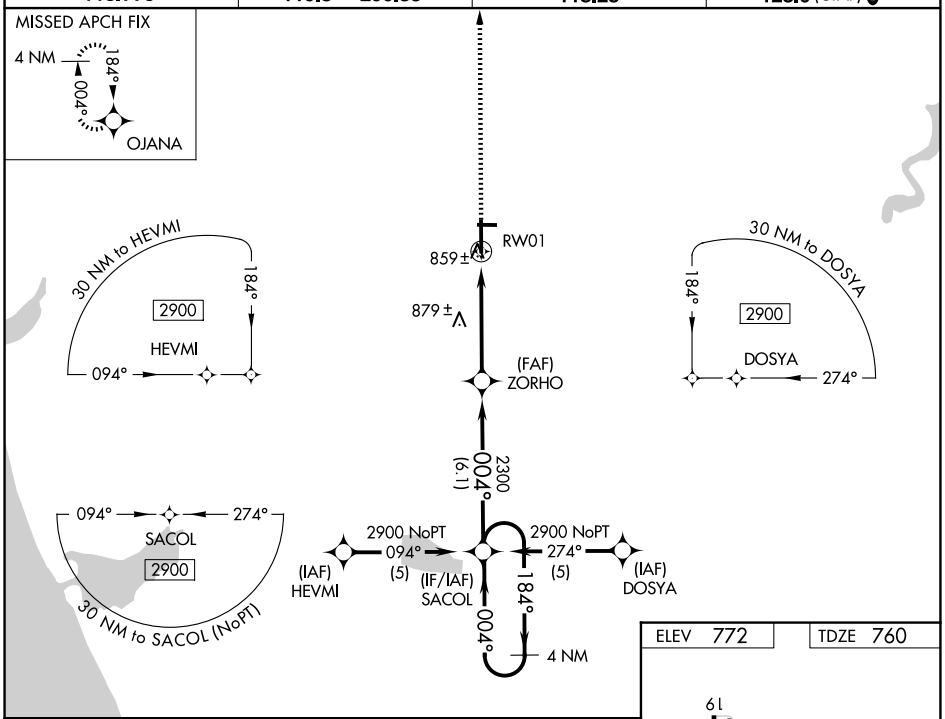

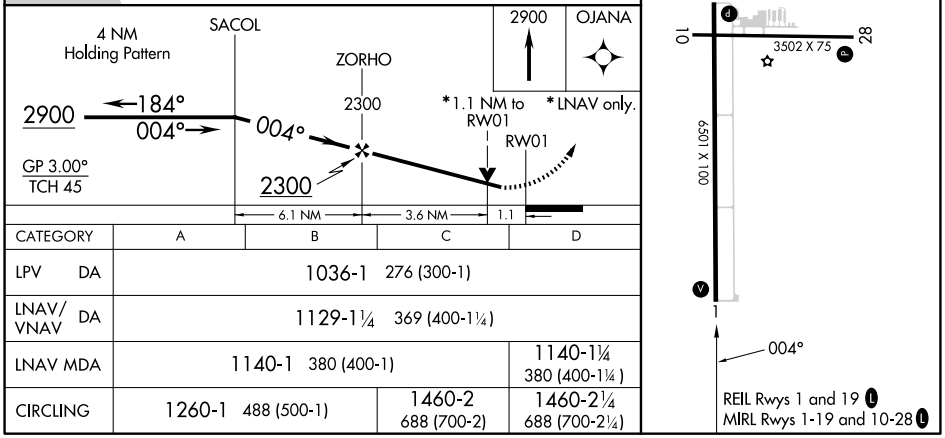

CATEGORY	A	B	C	D
LPV DA	1036-1 276 (300-1)			
LNAV/VNAV DA	1129-1¼ 369 (400-1¼)			
LNAV MDA	1140-1 380 (400-1)			1140-1¼ 380 (400-1¼)
CIRCLING	1260-1 488 (500-1)		1460-2 688 (700-2)	1460-2¼ 688 (700-2¼)

EC-1, 19 MAR 2026 to 16 APR 2026
EC-1, 19 MAR 2026 to 16 APR 2026