

WAAS CH 56517 W12A	APP CRS 121°	Rwy Ldg TDZE Apt Elev	6001 1339 1339
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

SPENCER MUNI (SPW)

RNP APCH-GPS.


⚠ Baro-VNAV and VDP NA when using Estherville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Estherville altimeter setting: increase LPV DA to 1599 feet, LNAV/VNAV DA to 1650 feet; increase all MDAs 60 feet, and visibility LNAV Cat C/D ½ SM, and Circling Cat C/D ¼ SM. For inop ALS when using Estherville altimeter setting, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D to 1 SM. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D to 1 SM.

MALSRL



MISSED APPROACH:
Climb to 4000 direct
ONUWA and hold.


ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	UNICOM 123.0 (CTAF) Ⓛ
------------------------	---	--

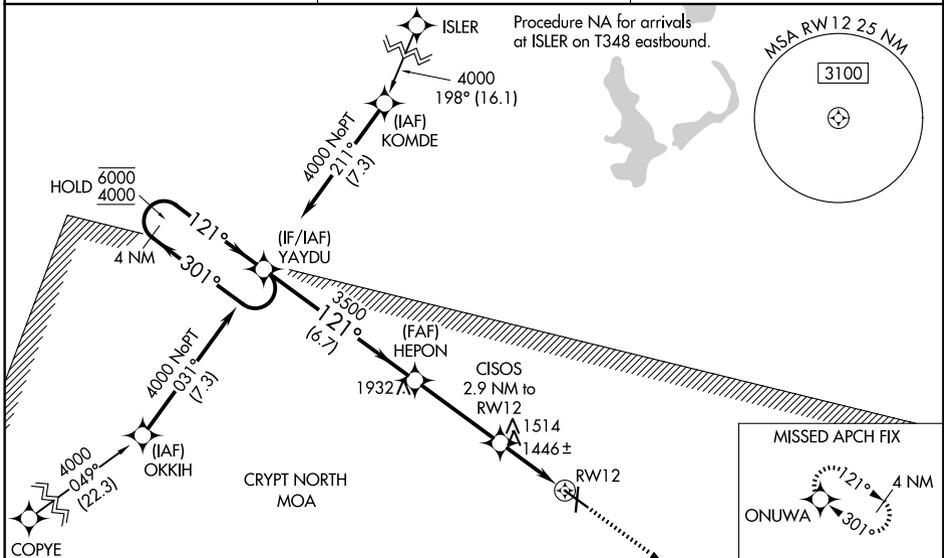

NC-3, 19 MAR 2026 to 16 APR 2026

NC-3, 19 MAR 2026 to 16 APR 2026

ELEV 1339	TDZE 1339
-----------	-----------

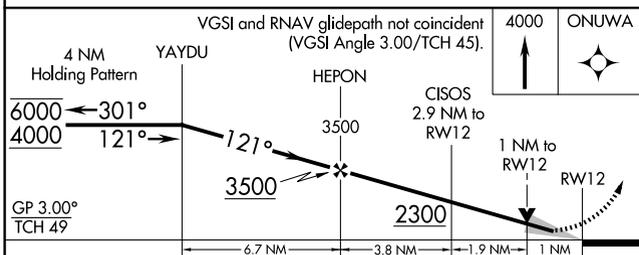

CATEGORY	A	B	C	D
LPV DA		1539-½	200 (200-½)	
LNAV/VNAV DA		1590-½	251 (300-½)	
LNAV MDA	1700-½	361 (400-½)	1700-⅝	361 (400-⅝)
CIRCLING	1760-1 421 (500-1)	1800-1 461 (500-1)	2100-2¼ 761 (800-2¼)	2100-2½ 761 (800-2½)

REIL Rwy 18, 30 and 36 **Ⓛ**

MIRL Rwy 12-30 and 18-36 **Ⓛ**