

LOC/DME I-ETI 110.7 Chan 44	APP CRS 091°	Rwy ldg 5350 TDZE 19 Apt Elev 19
---	------------------------	---


ILS or LOC RWY 9

CHARLESTON EXEC (JZI)

▼ DME required. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase DA to 307 feet and all MDAs 40 feet, increase S-ILS 9 visibility all Cats ½ SM; increase S-LOC 9 and Circling Cats C/D visibility ¼ SM; increase S-LOC YOCUB fix minimums Cats C/D visibility ¼ SM and Circling YOCUB fix minimums Cats C/D visibility ¼ SM. VDP NA when using Charleston AFB/Intl altimeter setting.

MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 on heading 272° and on CHS VORTAC R-219 to BASSO/CHS 24.9 DME and hold.

AWOS-3 123.775	CHARLESTON APP CON 120.7 306.925	CLNC DEL 119.85	UNICOM 122.8 (CTAF)
--------------------------	--	---------------------------	-------------------------------

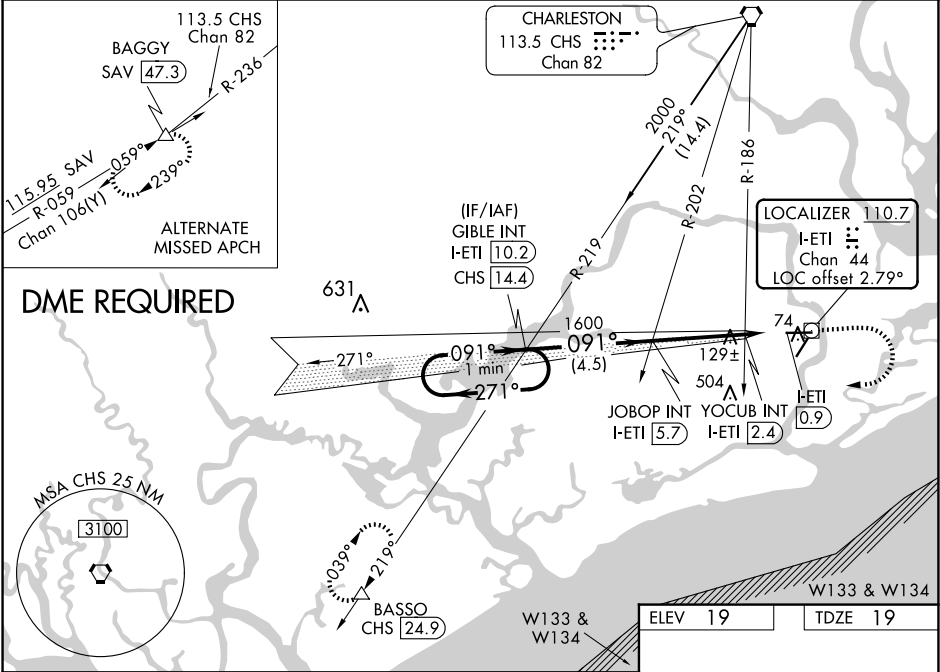

One Minute Holding Pattern	GIBLE INT I-ETI 10.2		JOBOP INT I-ETI 5.7		YOCUB INT I-ETI 2.4		1000 3000 hdg 272°		CHS R-219		BASSO △	
	1700 ← 271° 091° → 091° 1600										*LOC only.	
	GS 3.00° TCH 51											
	4.5 NM 3.3 NM 0.5 NM 1 NM											
CATEGORY	A		B		C		D					
S-ILS 9			275-¾		256 (300-¾)							
S-LOC 9	520-1		501 (600-1)		520-1⅜		501 (600-1⅜)					
CIRCLING	520-1		501 (600-1)		860-2½ 841 (900-2½)		860-2¾ 841 (900-2¾)					
YOCUB FIX MINIMUMS (DUAL VOR RECEIVERS or DME REQUIRED)												
S-LOC 9	380-1		361 (400-1)		380-1⅛		361 (400-1⅛)					
CIRCLING	460-1 441 (500-1)		480-1 461 (500-1)		860-2½ 841 (900-2½)		860-2¾ 841 (900-2¾)					

