

ZAAPA SIX DEPARTURE (RNAV)

EC-2, 19 MAR 2026 to 16 APR 2026


TOP ALTITUDE: ASSIGNED BY ATC
--

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

CLEVELAND DEP CON
125.35 346.325
ATIS
125.25
CINIC DEL
339.8
121.9 (when twr closed)
GND CON
121.9 339.8
LAKEFRONT TOWER*
124.3 (CTAF) 339.8

TAKEOFF MINIMUMS:
Rwys 6L, 24R: Standard with minimum climb of 500' per NM to 1100.
Rwys 6R: Standard with minimum climb of 500' per NM to 1100. NA when control tower closed.
Rwy 24L: 400-1³/₄ or standard with minimum climb of 757' per NM to 1000. NA when control tower closed.

NOTE: PUIUDL TRANSITION: For aircraft at or below FL220 only or as assigned by ATC.
NOTE: Rwy 6R/24L: Takeoff minimums NA when control tower closed.

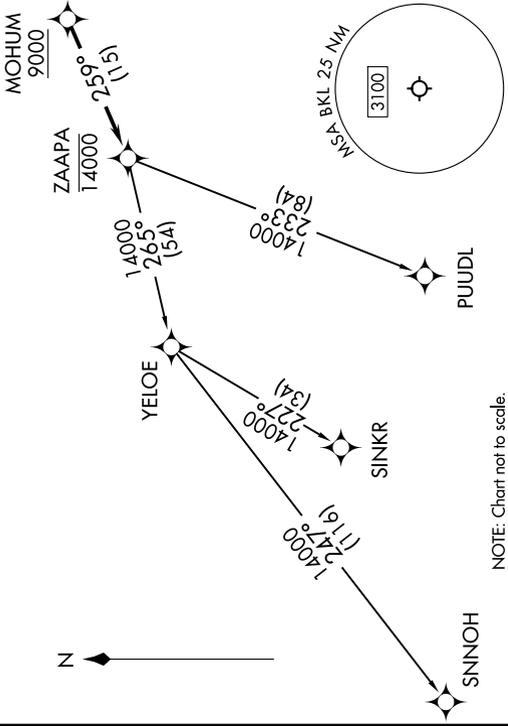

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6L/R: Climb on heading 065° to 1100, then on heading 349° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....

TAKEOFF RUNWAY 24L/R: Climb on heading 245° to 1100, then right turn heading 349° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross MOHUM at or above 9000, thence....

....on track 259° to cross ZAAPA at or below 14000, then on (transition). Maintain ATC assigned altitude, expect filed altitude ten minutes after departure.

PUIUDL TRANSITION (ZAAPA6.PUIUDL)
SINKR TRANSITION (ZAAPA6.SINKR)
SNNOH TRANSITION (ZAAPA6.SNNOH)

ZAAPA SIX DEPARTURE (RNAV)

EC-2, 19 MAR 2026 to 16 APR 2026