

WAAS CH 72707 W02A	APP CRS 023°	Rwy Ldg 5197 TDZE 826 Apt Elev 827
--	------------------------	---

RNAV (GPS) RWY 2


JOHN F KENNEDY MEML (ASX)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C.
▲ Rwy 2 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Baro-VNAV and VDP NA when using Ironwood altimeter setting. When local altimeter setting not received, use Ironwood altimeter setting and increase all DA 132 feet and all MDAs 140 feet; increase LPV all Cats and LNAV Cat C/D visibility $\frac{3}{4}$ SM, LNAV/VNAV all Cats and Circling Cat C/D visibility $\frac{1}{2}$ SM.

MISSED APPROACH:
Climb to 3200 direct
HOSUT and hold.

ASOS 126.775	MINNEAPOLIS CENTER 126.45 276.4	GCO 122.25	UNICOM 122.8 (CTAF) 0
------------------------	---	----------------------	--

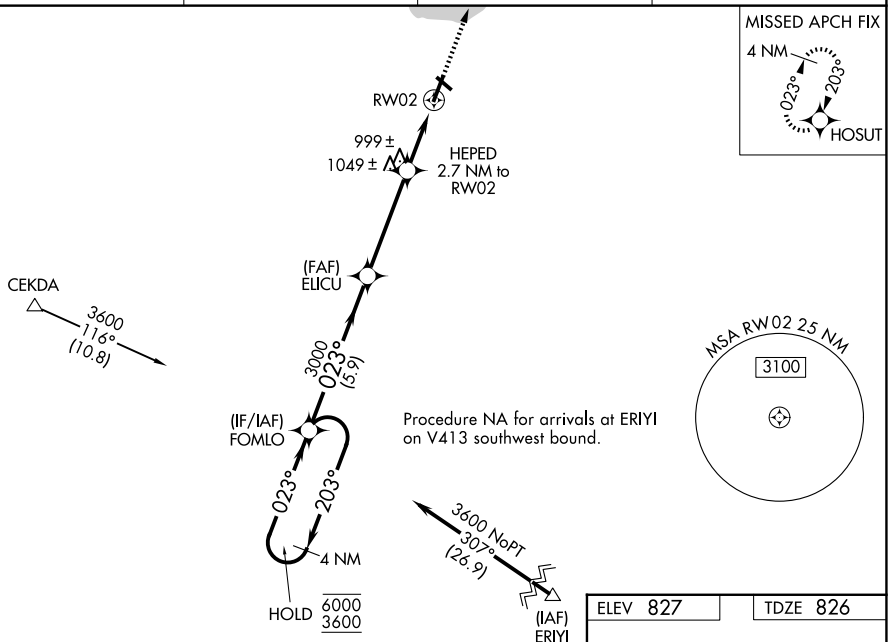

CATEGORY	A	B	C	D
LPV DA		1076-1	250 (300-1)	
LNAV/VNAV DA		1103-1	277 (300-1)	
LNAV MDA	1300-1	474 (500-1)	1300-1 3/8	474 (500-1 3/8)
CIRCLING	1300-1	473 (500-1)	1440-1 3/4 613 (700-1 3/4)	1560-2 1/4 733 (800-2 1/4)

ASHLAND, WISCONSIN
Amdt 1C 05NOV20

46°33'N-90°55'W

JOHN F KENNEDY MEML (ASX)

RNAV (GPS) RWY 2